
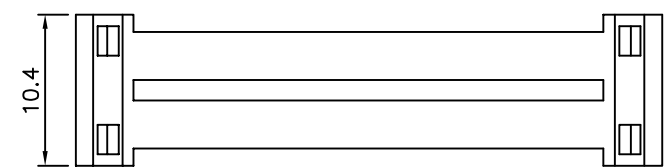
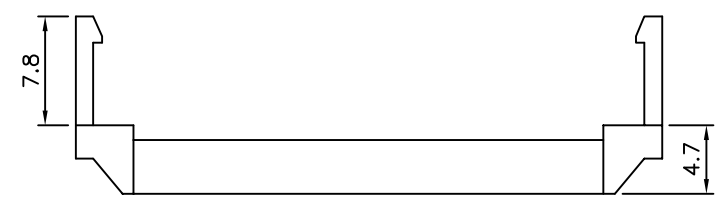
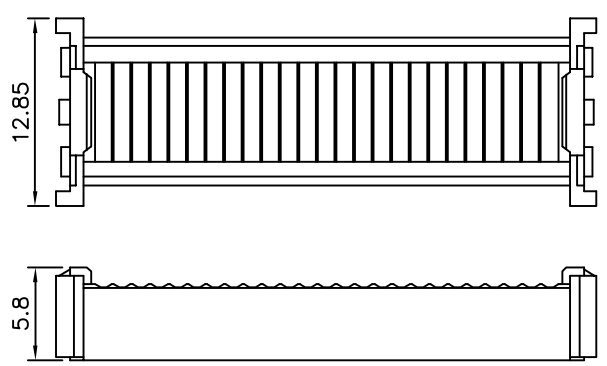



SPECIFICATION

Current Rating:3 Amp
 Voltage Rating:250V AC/RMS 60Hz
 Contact Resistance:20 Milliohms Max. At 1 Amp DC
 Insulation Resistance:1000 Megaohms At 500V DC
 Dielectric Withstanding Voltage:1000V AC/RMS 60Hz
 For 1 Minute
 Insulator:PBT+G.F.(UL94V-0),Blue
 Contact:Brass,Selective Gold Flash Over Nickel
 Shell:Steel,Tin Plated Over Copper
 RoHS Compliant

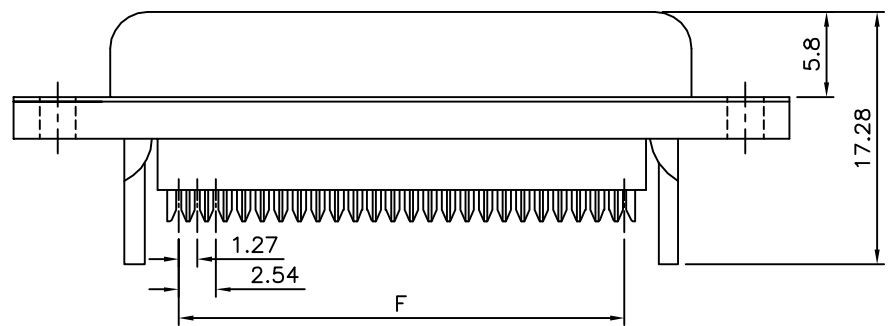

Pin	A	B	C	E	F
09	30.81	24.99	16.33	11.08	10.16
15	39.20	33.30	24.66	19.39	17.78
25	53.05	47.04	38.38	33.24	30.48
37	69.40	63.50	54.84	49.86	45.72

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 03048

APPROVED BY EMILY
 CHECKED BY HZF
 DRAWING BY SONG

SCALE NONE REV. A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ±0.38 X.* ±3.0°
 .X ±0.25 .X.* ±1.0°
 .XX ±0.13

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△A1		Modify Data	HZF	10/04/2013
△A0		NEW RELEASE	HZF	06/03/2008