



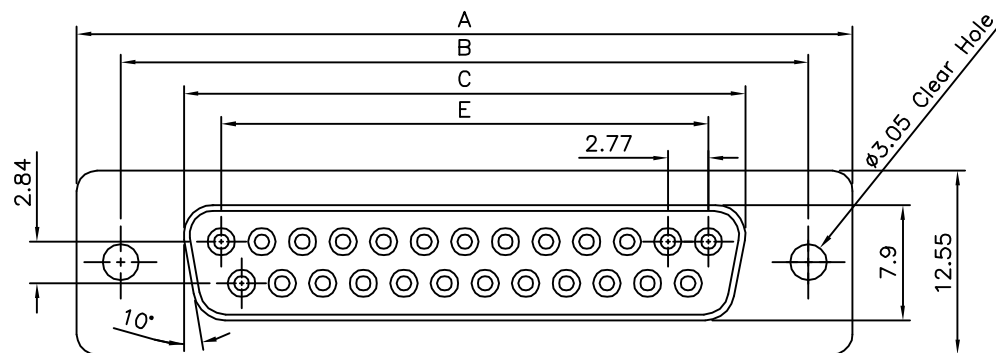


SPECIFICATION

Current Rating:3 Amp
Voltage Rating:250V AC/RMS 60Hz
Contact Resistance:20 Milliohms Max. At 1 Amp DC
Insulation Resistance:1000 Megaohms At 500V DC
Dielectric Withstanding Voltage:1000V AC/RMS 60Hz
For 1 Minute



Insulator:PBT+G.F.(UL94V-0),Blue
△ Contact:Brass,Selective Gold Flash Over Nickel
Shell:Steel,Tin Plated Over Copper
RoHS Compliant

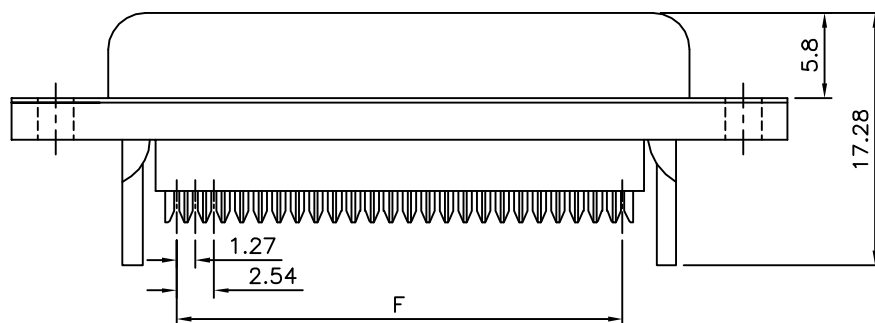


△ With Insulator Support



△

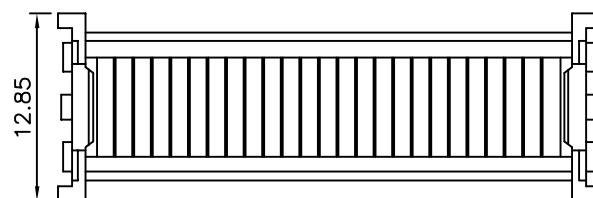

△ Cover

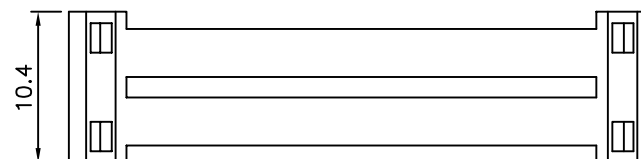

△ Strain Relief

Pin	A	B	C	E	F
09	30.81	24.99	16.33	11.08	10.16
15	39.20	33.30	24.66	19.39	17.78
25	53.05	47.04	38.38	33.24	30.48
37	69.40	63.50	54.84	49.86	45.72

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

03056

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

REV. A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ±0.38 X.* ±3.0°

.X ±0.25 .X* ±1.0°

.XX ±0.13

UNIT mm



⚠	A1	Modify Data	HZF	10/04/2013
⚠	A0	NEW RELEASE	HZF	06/03/2008
NO	REV	REVISIONS	CHK	DATE