

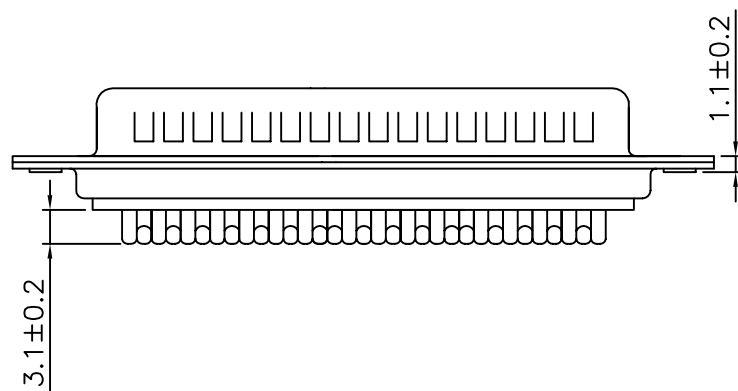


SPECIFICATIONS:

Contact Current Rating:1 Amp
 Dielectric Withstanding Voltage: AC 500V R.M.S.
 Insulation Resistance : 500Megohms Min. At DC 500V
 Contact Resistance:30Milliohms. Max.
 Operating Temperature:-55°C ~+105°C
 Contact:Brass ,Gold Plated
 Insulator:P.B.T.UL94V-0 Rated
 Shell:Cold Rolled Steel,Tin Plated

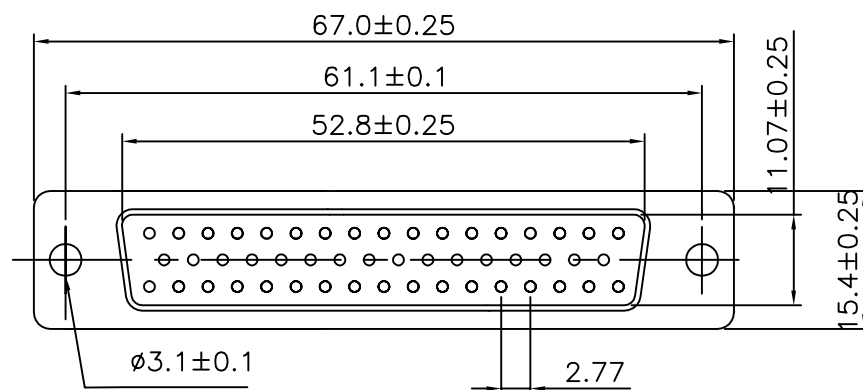

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

03264

APPROVED BY

MEI

CHECKED BY

RAN

DRAWING BY

HZF

UNLESS OTHERWISE
 SPECIFIED

TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG.

UNIT

mm



SCALE

NONE

REV.

A

AREA

REVISIONS

CHK

DATE