

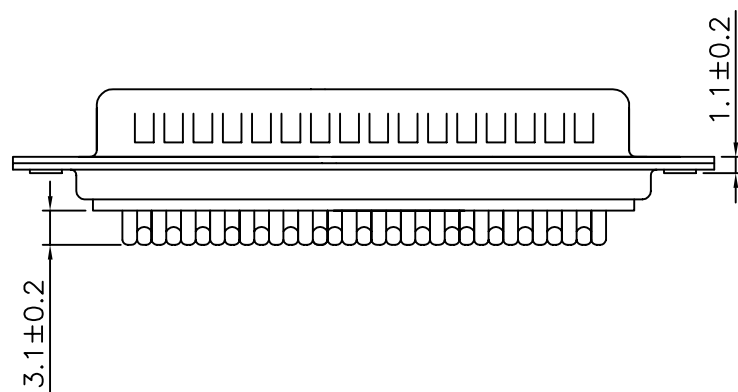


SPECIFICATIONS:

Contact Current Rating: 1 Amp
Dielectric Withstanding Voltage: AC 500V R.M.S.
Insulation Resistance : 500Megohms Min. At DC 500V
Contact Resistance: 30Milliohms. Max.
Operating Temperature: -55°C ~ +105°C
Contact: Brass ,Tin Plated
Insulator: P.B.T. UL94V-0 Rated
Shell: Cold Rolled Steel, Tin Plated

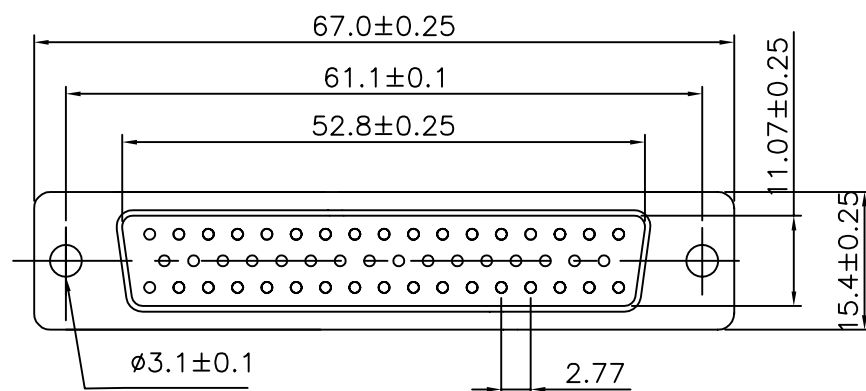

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

03268

APPROVED BY

MEI

CHECKED BY

RAN

DRAWING BY


HZF

SCALE

NONE

REV.

A

UNIT
mm

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ± 0.38
.XX ± 0.25
ANG.

AREA

REVISIONS

CHK

DATE