

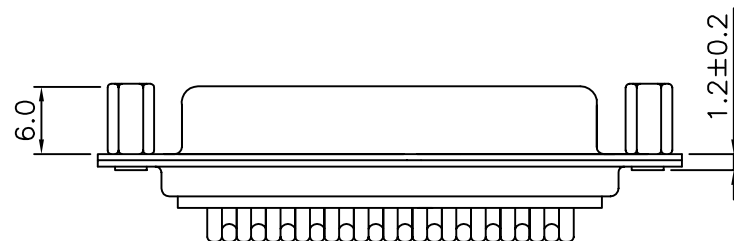


SPECIFICATIONS:

Contact Current Rating:1 Amp
 Dielectric Withstanding Voltage: AC 500V R.M.S.
 Insulation Resistance : 500Megohms Min. At DC 500V
 Contact Resistance:30Milliohms. Max.
 Operating Temperature:-55°C ~+105°C
 Contact:Brass ,Tin Plated
 Insulator:P.B.T.UL94V-0 Rated
 Shell:Cold Rolled Steel,Tin Plated

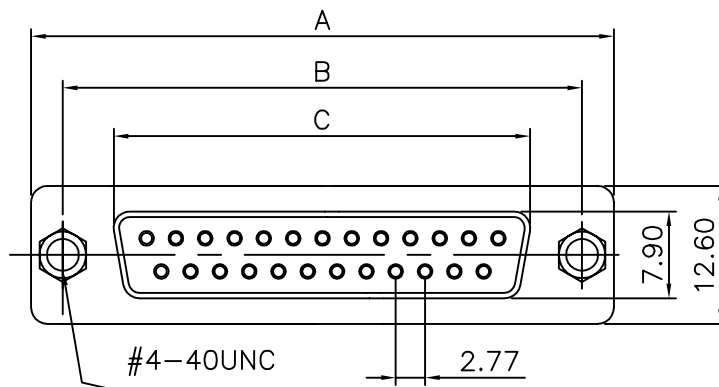

Positions	A±0.25	B±0.25	C±0.25
09	30.80	25.00	16.30
15	39.20	33.32	24.70
19	44.90	38.86	30.00
23	50.30	44.30	35.50
25	53.05	47.04	38.40
37	69.40	63.50	54.80

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

0323077E03

APPROVED BY

MEI

CHECKED BY

RAN

DRAWING BY

HZF

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.38

.XX ±0.25

AWG.

UNIT
 mm



SCALE

NONE

REV.

A

AREA

REVISIONS

CHK

DATE