
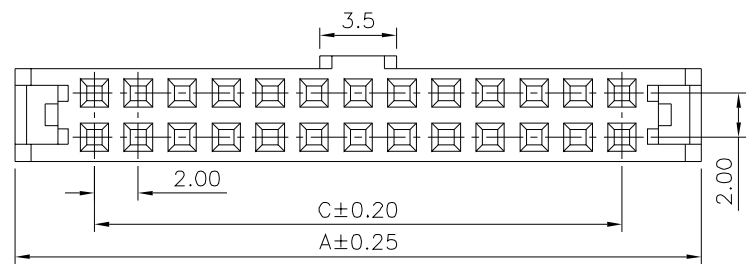



SPECIFICATION
 Current Rating: 1 Amp
 Withstanding Voltage: 500V AC For 1 Minute
 ⚠ Insulation Resistance: 1000 Megaohms Min.
 ⚠ Contact Resistance: 20 Milliohms Max.
 Operation Temperature: -40°C ~ +105°C
 Insulator: PBT+G.F.(UL94V-0)
 ⚠ Contact: Brass, Selective Gold Flash
 Over Nickel
 RoHS Compliant

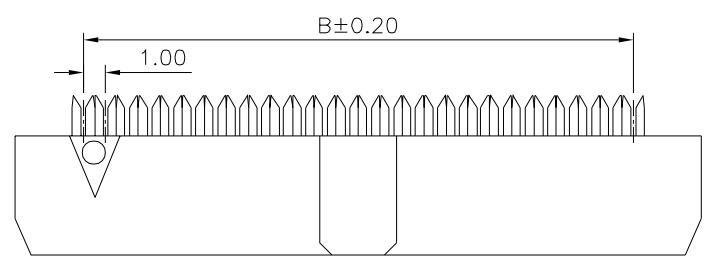

Pin	A	B	C
6	11.20	5.00	4.00
8	13.20	7.00	6.00
10	15.20	9.00	8.00
12	17.20	11.00	10.00
14	19.20	13.00	12.00
16	21.20	15.00	14.00
18	23.20	17.00	16.00
20	25.20	19.00	18.00
24	29.20	23.00	22.00
26	31.20	25.00	24.00
30	35.20	29.00	28.00
34	39.20	33.00	32.00
40	45.20	39.00	38.00
44	49.20	43.00	42.00
50	55.20	49.00	48.00
60	65.20	59.00	58.00

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.3 .X ±0.2 .XX ±0.1 .XXX ±0.05
03426		MEI		
		CHECKED BY	HZF	
		DRAWING BY	CYP	
SCALE	NONE	REV.	A2	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
⚠	A2	Modify Data	HZF	08/31/2016
⚠	A1	Modify Data	HZF	03/11/2013
⚠	A0	NEW RELEASE	HZF	04/29/2012