
File No.	697MH03001	SHEET	1/1

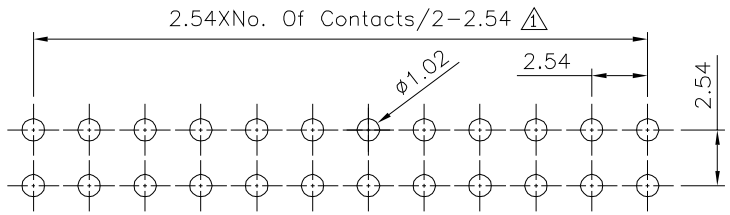

Recommended P.C.Board Layout

PCB Tolerance:±0.05(Top View)

① SPECIFICATION

Current Rating:3 Amps

④ Withstand Voltage:1000V AC Min./Minute

Contact Resistance:20 Milliohms Max.


Insulation Resistance:1000 Megaohms Min.

Operation Temperature:-40°C~+105°C

③ Insulator:PBT(UL94V-0),Black

Contact:Brass,Gold Flash Over Nickel

RoHS Compliant

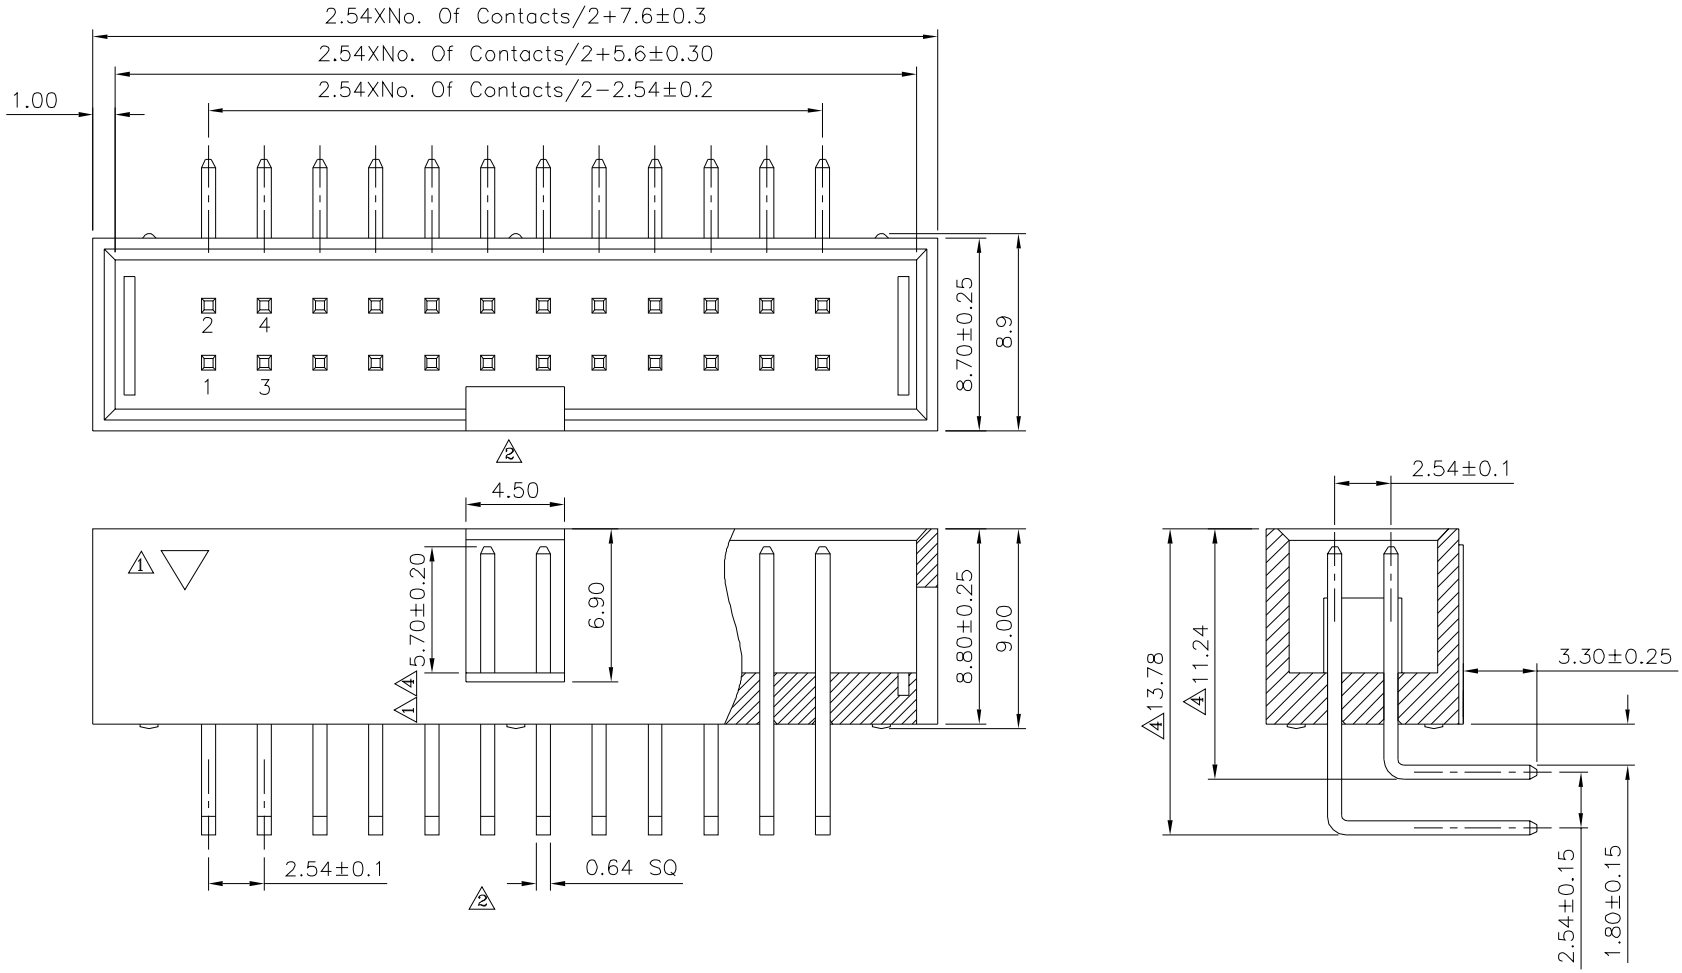

DRAWING No. ③	APPROVED BY MEI	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
03530	CHECKED BY HZF	① X. ±0.25 X.° ±2°	
	DRAWING BY CYP	.X ±0.20 .X° ±1.5°	
		.XX ±0.15 .XX° ±1°	
SCALE NONE	REV. A4	.XXX ±0.10 .XXX° ±0.5°	
		UNIT mm	

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

NO.	REV.	REVISIONS	CHK	DATE
④	A4	Modify Data	HZF	08/03/2022
③	A3	Modify Data	HZF	03/18/2016
②	A2	Modify Data	HZF	04/17/2015
①	A1	Modify Data	HZF	08/08/2014
⓪	A0	NEW RELEASE	HZF	12/18/2010