
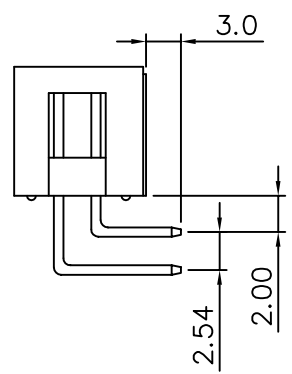


Recommended P.C.Board layout  
Bottom View

**SPECIFICATIONS**  
 Current Rating: 3 Amp Max  
 Dielectric Withstanding Voltage: 1000V AC  
 R.M.S. For One Minute  
 Contact Resistance: 20Milliohms Max.  
 Insulation Resistance: 5000 Megohms Min.  
 At 1000V DC  
 Operating Temperature: -55°C To +105°C  
 Contact : SQ 0.64mm, Brass, Gold Plating  
 Insulation : PBT(UL 94V-0)

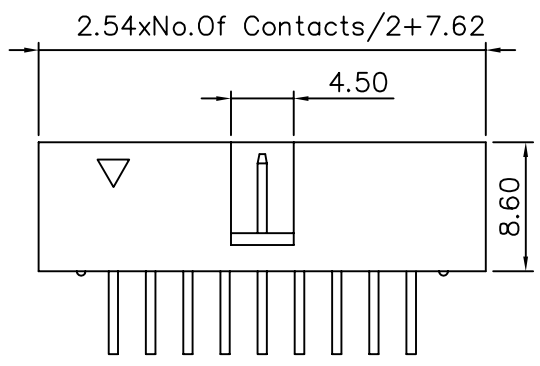

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 .XX ±0.20 AWG.
03541		MEI		
		RAN		
		DRAWING BY		
		HZF		
SCALE	NONE	REV.	A	UNIT mm

AREA	REVISIONS	CHK	DATE