
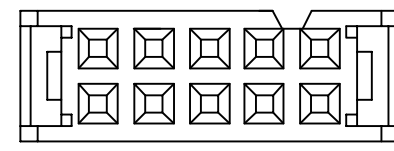

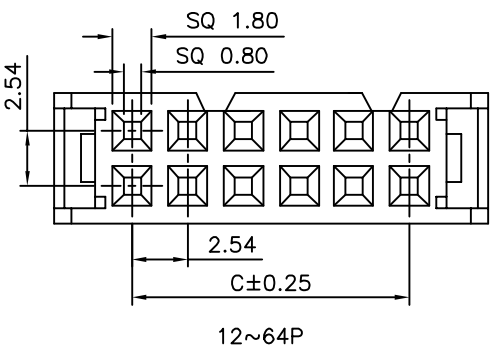
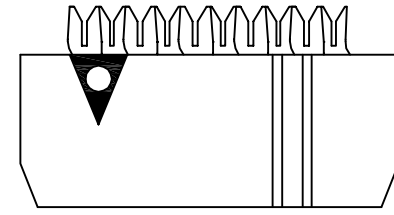



SPECIFICATION
 Withstanding Voltage:500V AC For 1 Minute
 Insulation Resistance:100 Megaohms Min.
 At 500V DC
 Contact Resistance:1 Ohms Max.
 Operation Temperature:-40°C~+105°C
 △ Insulator:PBT+G.F.(UL94V-0),Black
 △ Contact:Brass,Selective Gold Flash Over Nickel
 RoHS Compliant

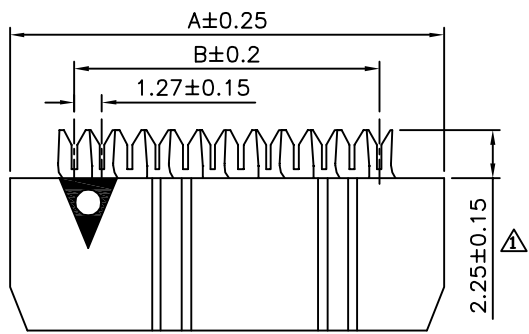

Pin	A	B	C
06	12.32	6.35	5.08
08	14.86	8.89	7.62
10	17.40	11.43	10.16
12	19.94	13.97	12.70
14	22.48	16.51	15.24
16	25.02	19.05	17.78
18	27.56	21.59	20.32
20	30.10	24.13	22.86
24	35.18	29.21	27.94
26	37.72	31.75	30.48
30	42.80	36.83	35.56
34	47.88	41.91	40.64
40	55.50	49.53	48.26
44	60.58	54.61	53.34
50	68.20	62.23	60.96
60	80.90	74.93	73.66
64	85.98	80.01	78.74

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.30 .X ±0.20 .XX ±0.10 .XXX ±0.03
03642		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		
		SONG		
SCALE	NONE	REV.	A1	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	09/12/2013
△ A0		NEW RELEASE	HZF	10/02/2009