
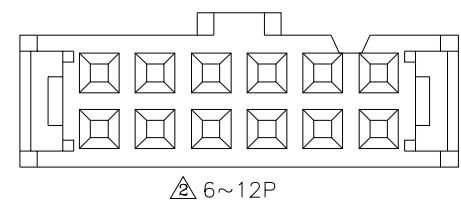
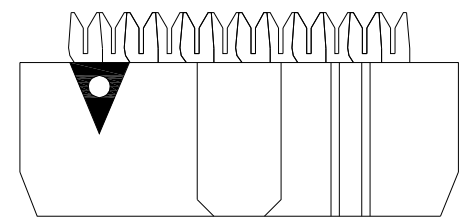
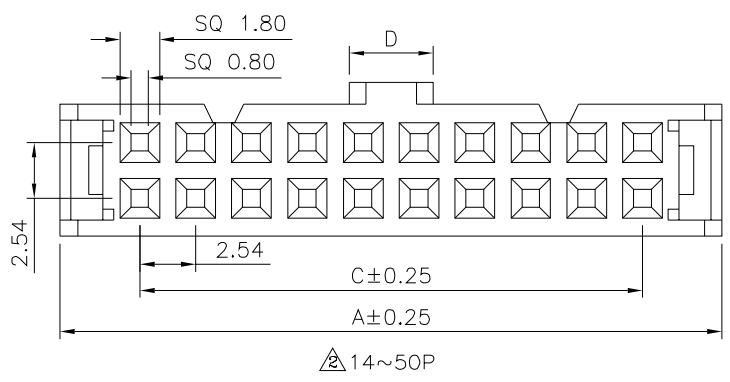



**△ SPECIFICATION**

Contact Resistance: 1 Ohms Max.  
 Insulation Resistance: 100 Megaohms Min. At DC 500V  
 Withstanding Voltage: 500V AC For 1 Minute  
 Operation Temperature: -40°C ~ +105°C  
 Insulator: PBT+G.F.(UL94V-0), Black  
 Contact: Brass, Gold Flash Over Nickel  
 RoHS Compliant

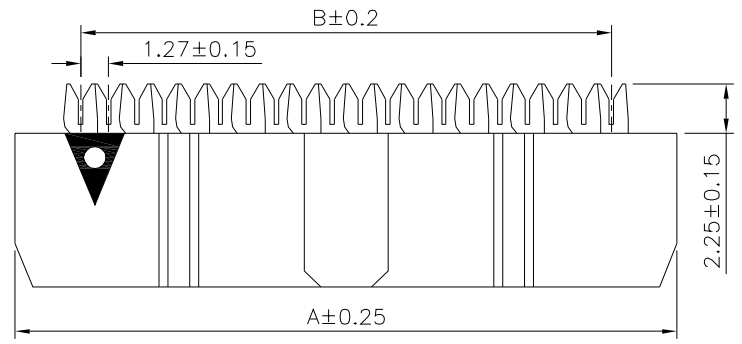

Pin	A	B	C	D
6	12.32	6.35	5.08	1.9
8	14.86	8.89	7.62	1.9
10	17.40	11.43	10.16	3.8
12	19.94	13.97	12.70	3.8
14	22.48	16.51	15.24	3.8
16	25.02	19.05	17.78	3.8
20	30.10	24.13	22.86	3.8
24	35.18	29.21	27.94	3.8
26	37.72	31.75	30.48	3.8
30	42.80	36.83	35.56	3.8
34	47.88	41.91	40.64	3.8
40	55.50	49.53	48.26	3.8
50	68.20	62.23	60.96	3.8

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. △		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ X. ±0.30 .X ±0.20 .XX ±0.10 .XXX ±0.05
03644		MEI		
		CHECKED BY	HZF	
SCALE	NONE	DRAWING BY	CYP	
REV.	B2	UNIT	mm	

NO.	REV.	REVISIONS	CHK	DATE
△ B2		Modify Data	HZF	09/10/2015
△ B1		Modify Data	HZF	05/28/2008
△ B0		NEW RELEASE	BECKY	04/04/2006