
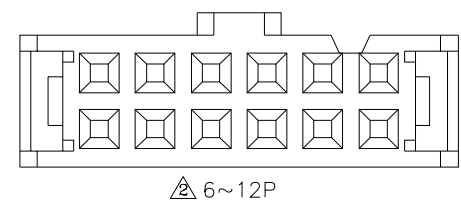
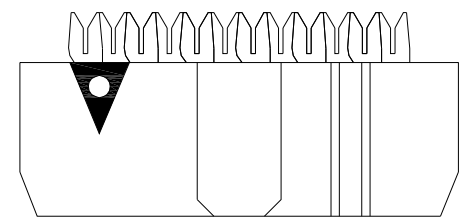
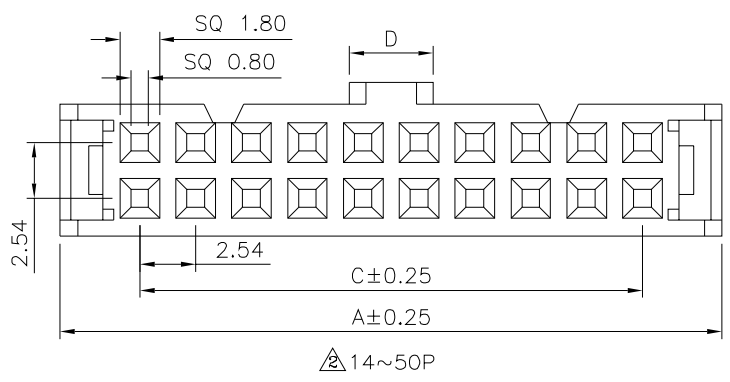



△ SPECIFICATION

Contact Resistance: 1 Ohms Max.
 Insulation Resistance: 100 Megaohms Min. At DC 500V
 Withstanding Voltage: 500V AC For 1 Minute
 Operation Temperature: -40°C ~ +105°C
 Insulator: PBT+G.F. (UL94V-0), Black
 Contact: Brass, Gold Flash Over Nickel
 RoHS Compliant

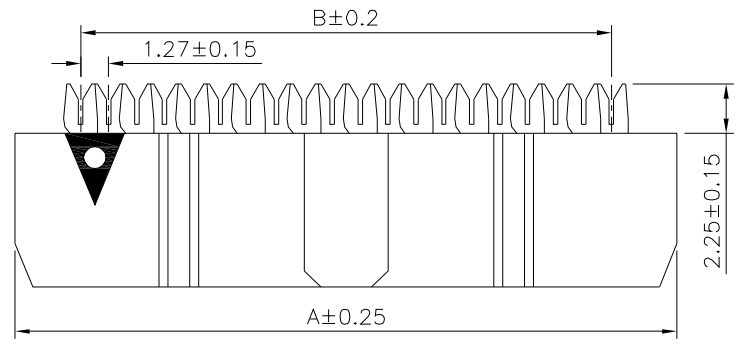

| Pin | A | B | C | D |
|-----|-------|-------|-------|-----|
| 6 | 12.32 | 6.35 | 5.08 | 1.9 |
| 8 | 14.86 | 8.89 | 7.62 | 1.9 |
| 10 | 17.40 | 11.43 | 10.16 | 3.8 |
| 12 | 19.94 | 13.97 | 12.70 | 3.8 |
| 14 | 22.48 | 16.51 | 15.24 | 3.8 |
| 16 | 25.02 | 19.05 | 17.78 | 3.8 |
| 20 | 30.10 | 24.13 | 22.86 | 3.8 |
| 24 | 35.18 | 29.21 | 27.94 | 3.8 |
| 26 | 37.72 | 31.75 | 30.48 | 3.8 |
| 30 | 42.80 | 36.83 | 35.56 | 3.8 |
| 34 | 47.88 | 41.91 | 40.64 | 3.8 |
| 40 | 55.50 | 49.53 | 48.26 | 3.8 |
| 50 | 68.20 | 62.23 | 60.96 | 3.8 |

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

| | | | | |
|---------------|------|-------------|-----|--|
| DRAWING No. △ | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ X. ±0.30 .X ±0.20 .XX ±0.10 .XXX ±0.05 |
| 03647 | | MEI | | |
| | | CHECKED BY | HZF | |
| | | DRAWING BY | CYP | |
| SCALE | NONE | REV. | B2 | UNIT mm |

| | | | |
|----------|-------------|-------|------------|
| △ B2 | Modify Data | HZF | 09/10/2015 |
| △ B1 | Modify Data | HZF | 05/28/2008 |
| △ B0 | NEW RELEASE | BECKY | 04/04/2006 |
| NO. REV. | REVISIONS | CHK | DATE |