



**△ SPECIFICATION**


Withstand Voltage:500V AC For 1 Minute  
 Contact Resistance:1 Ohms Max.  
 Insulation Resistance:100 Megaohms Min.  
 At 500V DC  
 Operation Temperature:-40°C~+105°C  
 Insulator:PBT+G.F.(UL94V-0),Black  
 Contact:Brass,Selective Gold Flash Over Nickel  
 RoHS Compliant



△ 6~12P

△

Pin	A	B	C	D
6	12.32	6.35	5.08	12.12
8	14.86	8.89	7.62	14.66
10	17.40	11.43	10.16	17.20
12	19.94	13.97	12.70	19.74
14	22.48	16.51	15.24	22.28
16	25.02	19.05	17.78	24.82
20	30.10	24.13	22.86	29.90
24	35.18	29.21	27.94	34.98
26	37.72	31.75	30.48	37.52
30	42.80	36.83	35.56	42.60
34	47.88	41.91	40.64	47.68
40	55.50	49.53	48.26	55.30
50	68.20	62.23	60.96	68.00

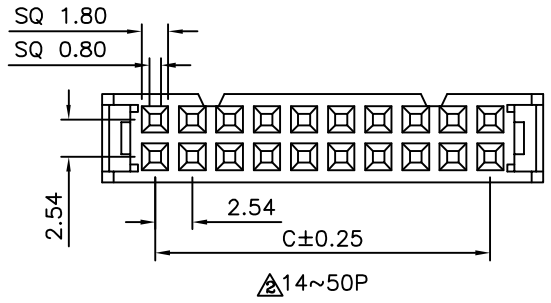

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ X ±0.30 .X ±0.20 .XX ±0.10 .XXX ±0.05
03667		EMILY		
		CHECKED BY HZF		
		DRAWING BY GAO		
SCALE	NONE	REV.	B2	UNIT mm

△ B2	Modify Data	HZF	12/26/2012
△ B1	Modify Drawing	BECKY	08/08/2006
△ B0	NEW RELEASE	BECKY	04/04/2006
NO. REV.	REVISIONS	CHK	DATE