

## △ SPECIFICATION

Contact Resistance:1 Ohms Max.

Insulation Resistance:100 Megaohms Min. At DC 500V





Withstanding Voltage:500V AC For 1 Minute

Operation Temperature:-40°C~+105°C

Insulator:PBT+G.F.(UL94V-0),Black

△ Contact:Brass,Selective Gold Flash Over Nickel

RoHS Compliant

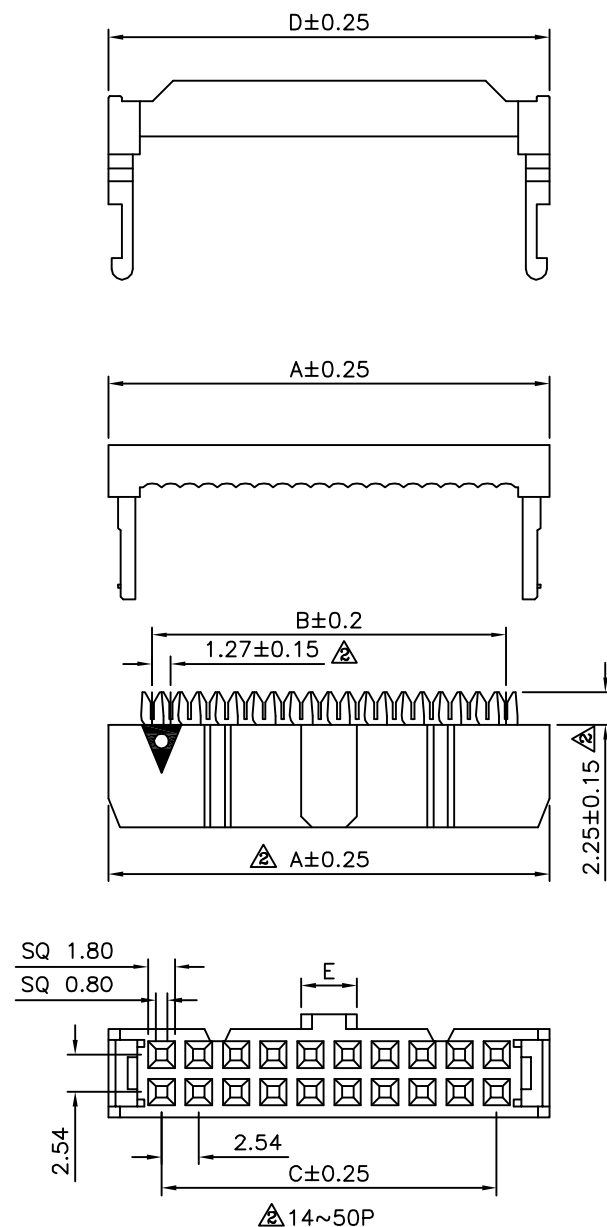

△ 6~12P

△△△

| Pin | A     | B     | C     | D     | E   |
|-----|-------|-------|-------|-------|-----|
| 6   | 12.32 | 6.35  | 5.08  | 12.12 | 1.9 |
| 8   | 14.86 | 8.89  | 7.62  | 14.66 | 1.9 |
| 10  | 17.40 | 11.43 | 10.16 | 17.20 | 3.8 |
| 12  | 19.94 | 13.97 | 12.70 | 19.74 | 3.8 |
| 14  | 22.48 | 16.51 | 15.24 | 22.28 | 3.8 |
| 16  | 25.02 | 19.05 | 17.78 | 24.82 | 3.8 |
| 20  | 30.10 | 24.13 | 22.86 | 29.90 | 3.8 |
| 24  | 35.18 | 29.21 | 27.94 | 34.98 | 3.8 |
| 26  | 37.72 | 31.75 | 30.48 | 37.52 | 3.8 |
| 30  | 42.80 | 36.83 | 35.56 | 42.60 | 3.8 |
| 34  | 47.88 | 41.91 | 40.64 | 47.68 | 3.8 |
| 40  | 55.50 | 49.53 | 48.26 | 55.30 | 3.8 |
| 50  | 68.20 | 62.23 | 60.96 | 68.00 | 3.8 |

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

03674

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

SCALE

NONE

REV.


B3

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE

△△ X.  $\pm 0.30$   
△△ .X  $\pm 0.20$   
△△ .XX  $\pm 0.10$   
△△ .XXX  $\pm 0.05$

UNIT

mm



NO.

REV.

B3

B2

B1

B0

Modify Data

Modify Data

Del Pin#60, Pin#64

NEW RELEASE

HZF

HZF

HZF

BECKY

DATE

06/24/2015

09/24/2010

11/28/2007

04/04/2006