



△ SPECIFICATION


Withstand Voltage:500V AC For 1 Minute
 Contact Resistance:1 Ohms Max.
 Insulation Resistance:100 Megaohms Min.
 At 500V DC
 Operation Temperature:-40°C~+105°C
 Insulator:PBT+G.F.(UL94V-0),Black
 Contact:Brass,Selective Gold Flash Over Nickel
 RoHS Compliant



△ 6~12P

△

Pin	A	B	C	D
6	12.32	6.35	5.08	12.12
8	14.86	8.89	7.62	14.66
10	17.40	11.43	10.16	17.20
12	19.94	13.97	12.70	19.74
14	22.48	16.51	15.24	22.28
16	25.02	19.05	17.78	24.82
20	30.10	24.13	22.86	29.90
24	35.18	29.21	27.94	34.98
26	37.72	31.75	30.48	37.52
30	42.80	36.83	35.56	42.60
34	47.88	41.91	40.64	47.68
40	55.50	49.53	48.26	55.30
50	68.20	62.23	60.96	68.00

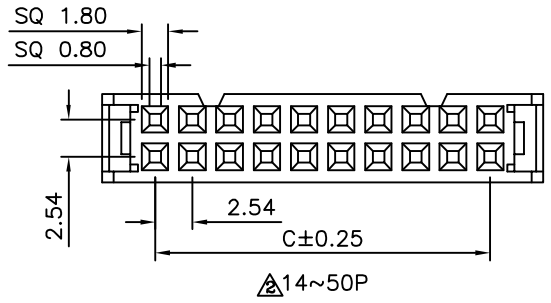

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ X ±0.30 .X ±0.20 .XX ±0.10 .XXX ±0.05
03698		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		
		GAO		
SCALE	NONE	REV.	B2	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ B2		Modify Data	HZF	12/26/2012
△ B1		Modify Drawing	BECKY	08/08/2006
△ B0		NEW RELEASE	BECKY	04/04/2006