
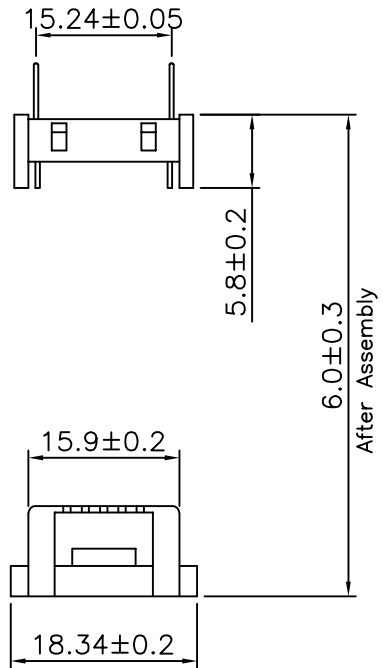
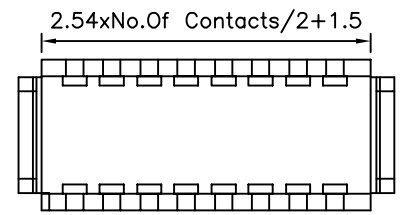
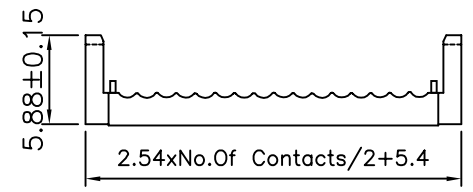
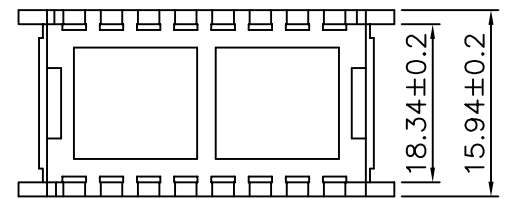
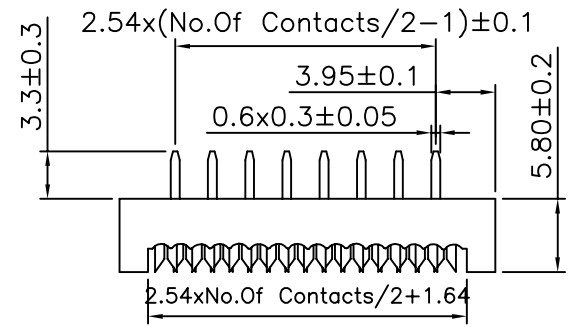


$2.54 \times \text{No. Of Contacts} / 2 + 5.4$

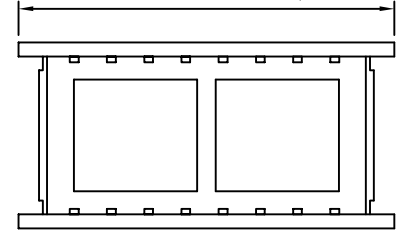

SPECIFICATIONS:
 Current Rating: 3A
 Voltage: 500V RMS 60Hz At Sea Leaver
 On Min Contact Spacing
 Insulation Resistance: 1000 Megohms
 Operating Temperature: -50°C To +105°C
 Contact: Bronze, Gold Over Nickel Or Tin
 Insulator: PBT+30% Glass Fiber (UL 94V-0)
 Color: Black

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 AWG.
03783		MEI		
		CHECKED BY		
		RAN		
		DRAWING BY		
		HZF		
SCALE	NONE	REV.	A	UNIT
				mm

AREA	REVISIONS	CHK	DATE