
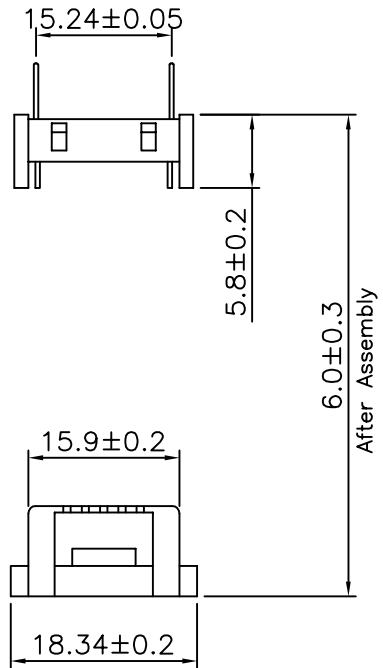
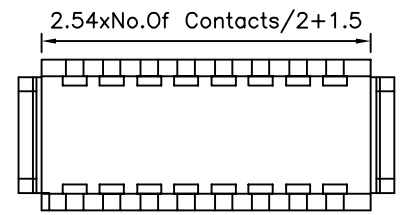
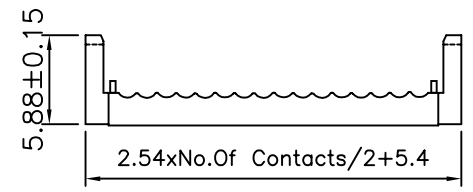
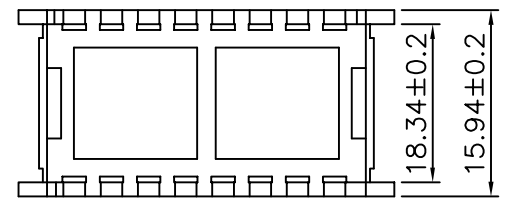
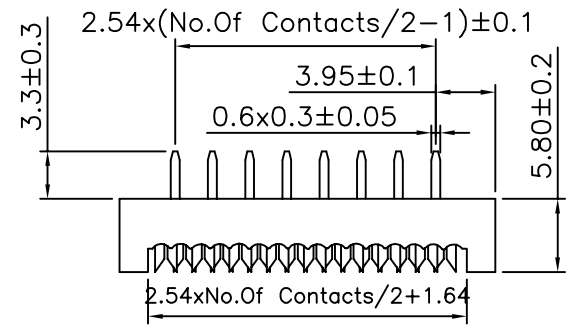


$2.54 \times \text{No. Of Contacts} / 2 + 5.4$

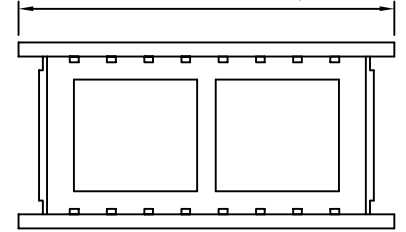

**SPECIFICATIONS:**  
 Current Rating: 3A  
 Voltage: 500V RMS 60Hz At Sea Leaver  
 On Min Contact Spacing  
 Insulation Resistance: 1000 Megohms  
 Operating Temperature: -50°C To +105°C  
 Contact: Bronze, Gold Over Nickel Or Tin  
 Insulator: PBT+30% Glass Fiber (UL 94V-0)  
 Color: Black

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 AWG.
03784		MEI		
		RAN		
		DRAWING BY		
		HZF		
SCALE	NONE	REV.	A	UNIT mm

AREA	REVISIONS	CHK	DATE