



**SPECIFICATION**


Rating:100V AC 1A Max.  
 Contact Resistance:Pins:30 Milliohms Max.  
 Shell:50 Milliohms Max.  
 Insulation Resistance:100 Megaohms Min.  
 @ 500V DC  
 Withstanding Voltage:250V AC RMS For 1 Minute  
 RoHS Compliant

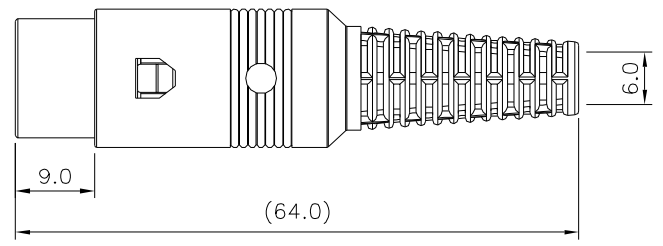


⚠



⚠

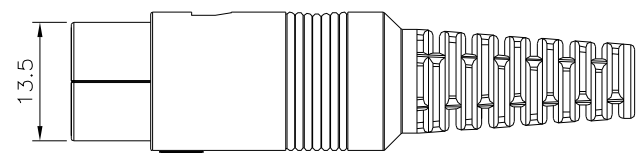

⚠

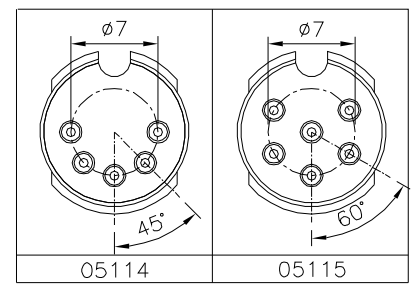

⚠

No.	Description	Q'ty	Material	Remark
①	Shell Cover	1	EVA	Black
②	Shield Cover A	1	Steel	Nickel Plated
③	Shield Cover B	1	Steel	Nickel Plated
④	Housing	1	ABS	
⑤	Contact Terminals	XX	Brass	Nickel Plated

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.3 .XX ±0.20 ANG.
05115		MEI		
		CHECKED BY	HZF	
		DRAWING BY	LZX	
SCALE	NONE	REV.	A1	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
⚠	A1	Modify Data	HZF	01/30/2024
⚠	A0	NEW RELEASE	HZF	01/25/2022