


△ SPECIFICATION
 Rating: 100V AC At 1A
 Dielectric Strength: 250V AC For 1 Minute
 Insulation Resistance: 100 Megaohms Min.
 At 500V DC

△ Boot: PVC, Black
Metal Part: Steel, Nickel Plated
Insulator: PBT, Black
Contacts: Brass, Silver Plated
RoHS Compliant

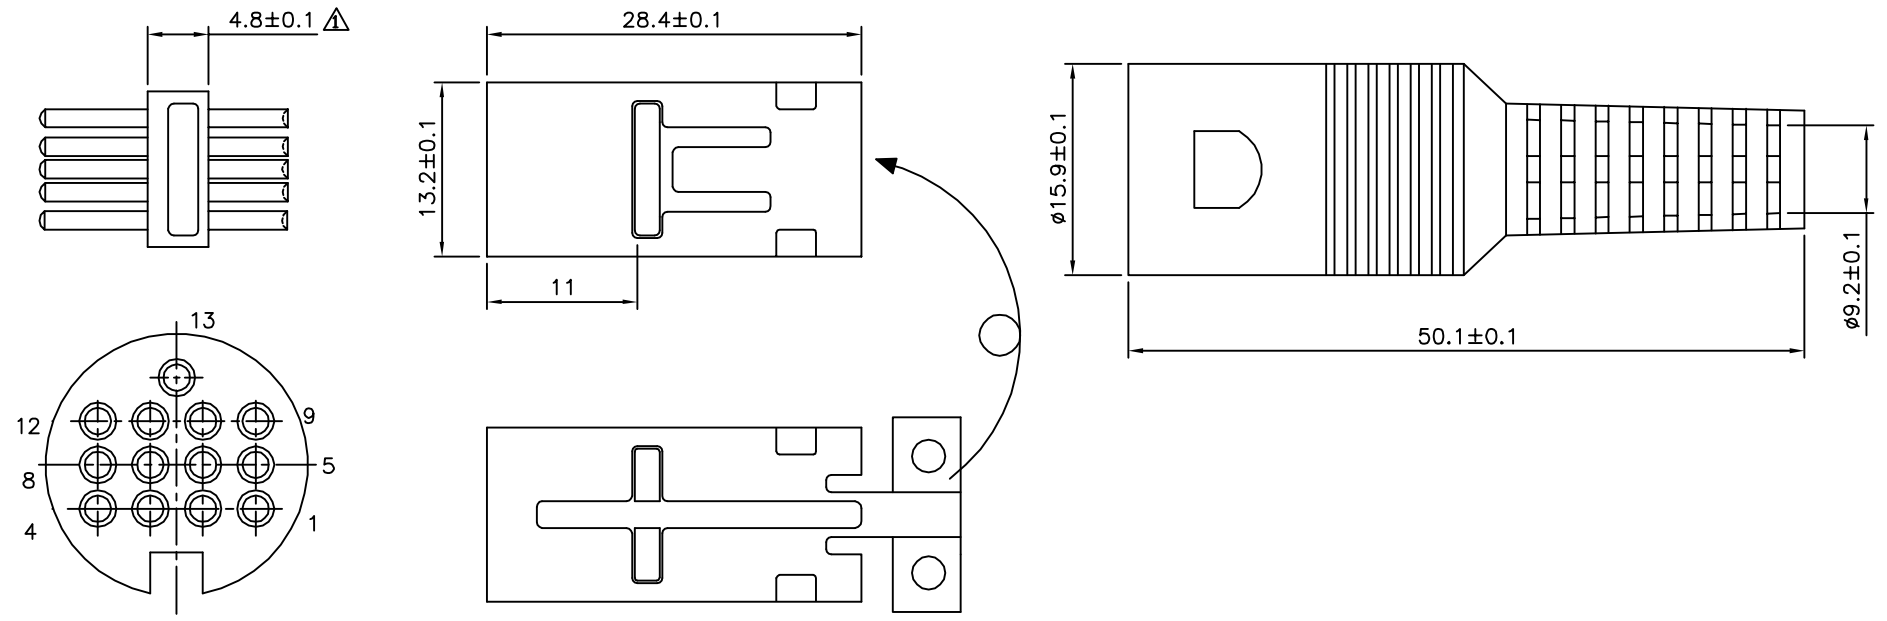

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.1 .XX ±0.05 ANG.
05120		MEI		
		CHECKED BY	HZF	
DRAWING BY		SONG		
SCALE	NONE	REV.	A3	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A3		Modify Data	HZF	05/05/2012
△ A2		Modify Material	HZF	06/24/2011
△ A1		Modify Dim. 4.3-->4.8	HZF	02/17/2011
△ A0		NEW RELEASE	BECKY	09/16/2005