
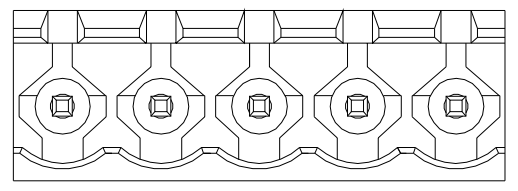
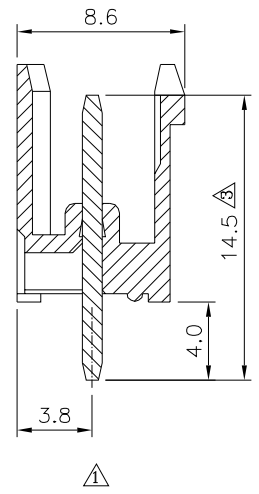


Recommended P.C.B. Layout

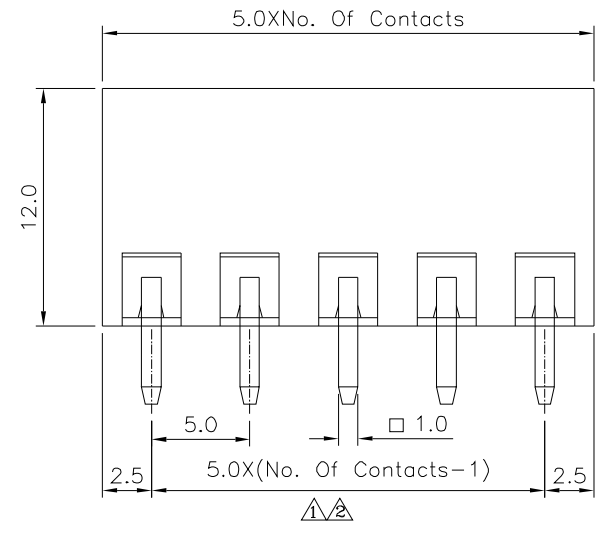

△△ SPECIFICATION

Voltage Rating:300V AC
 Current Rating:16A
 Withstanding Voltage:2500V AC(1 Minute)
 Using Temperature Range:-40°C~+105°C
 Solder Pin:Copper Alloy,Tin Plated
 Insulator Body:Polyamide+G.F.(UL94V-0),Green
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △△
05319

APPROVED BY EMILY
 CHECKED BY HZF
 DRAWING BY HAO

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 △ X. ±0.50
 △.X ±0.30
 △.XX ±0.20
 ANG. ±1°

SCALE NONE

REV. A3

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△3	A3	Modify Data	HZF	10/30/2023
△2	A2	Modify Data	HZF	10/24/2015
△1	A1	Modify Data	HZF	08/08/2012
△0	A0	NEW RELEASE	HZF	08/12/2009