
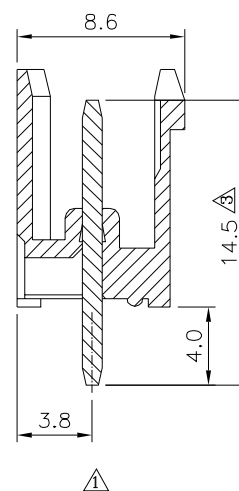
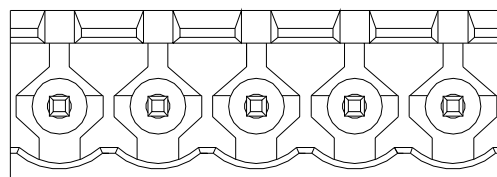


Recommended P.C.B. Layout

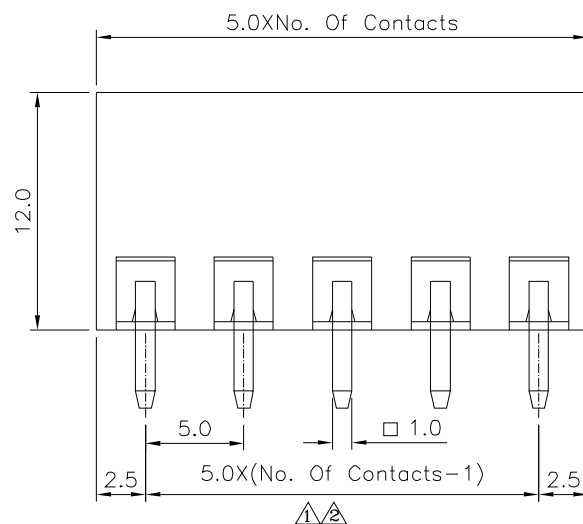

SPECIFICATION

Voltage Rating:300V AC
Current Rating:16A
Withstanding Voltage:2500V AC(1 Minute)
Using Temperature Range:-40°C~+105°C
Solder Pin:Copper Alloy,Tin Plated
Insulator Body:Polyamide+G.F.(UL94V-0),Green
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 13

05325

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY


HZF

DRAWING BY

HAO

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

	X. ± 0.50
	.X ± 0.30
	.XX ± 0.20
	ANG. $\pm 1^\circ$



Δ	ΔZ

3	Modify Data
---	-------------

1175

	10/30/2023
--	------------

$\triangle 3$	A3
$\triangle$	10

1	Modify Data
2	Modify Data

[illegible]

10/30/2023
10/24/2015

	A1
---	----

Modify Data

HZF

08/08/2012

		A0
--	---	----

NEW RELEASE

HZF

08/12/2009