
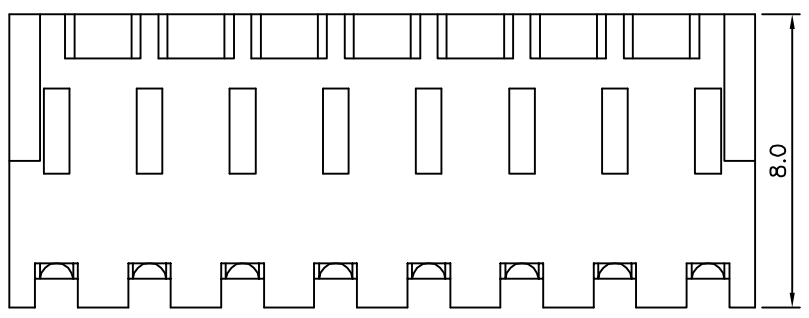
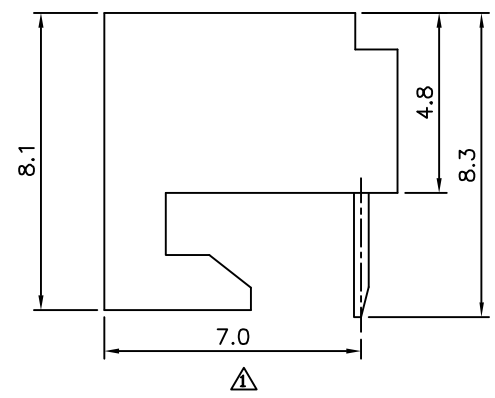
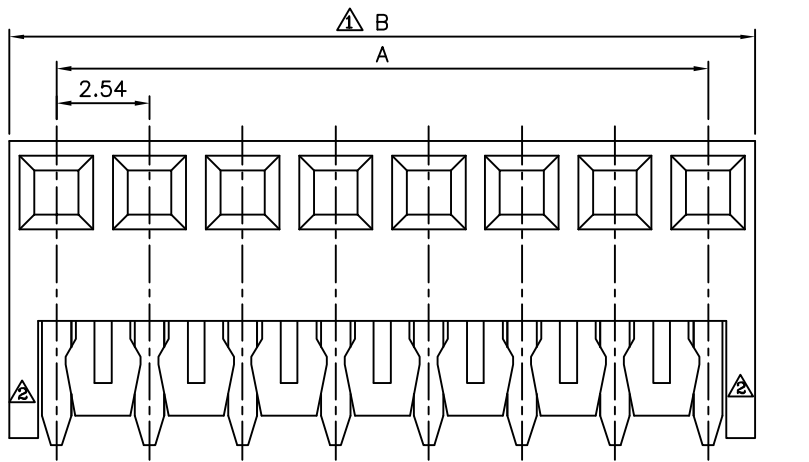


**SPECIFICATION**  
 Current:2.5A Max.  
 Voltage:250V AC Max.  
 Insulation Resistance:500K Megaohms Min.  
 Contact Resistance:20 Milliohms Max.  
 Dielectric Withstanding Voltage:1500V AC  
 Temperature Range:0°C~+75°C  
 Housing:PA66(UL94V-2),White  
 Contact:Brass,Tin Plated Over Nickel  
 RoHS Compliant

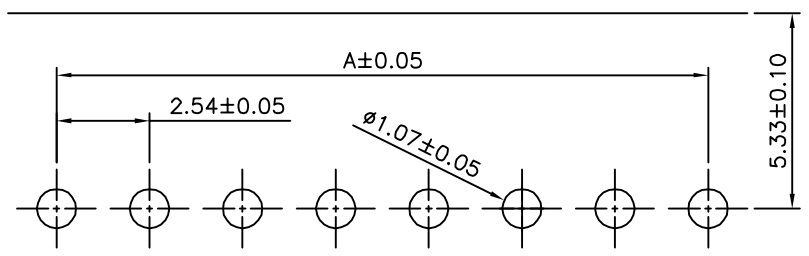

| Pin | A     | B     | Pin | A     | B     |
|-----|-------|-------|-----|-------|-------|
| 02  | 2.54  | 5.10  | 16  | 38.10 | 40.66 |
| 03  | 5.08  | 7.64  | 17  | 40.64 | 43.20 |
| 04  | 7.62  | 10.18 | 18  | 43.18 | 45.74 |
| 05  | 10.16 | 12.72 | 19  | 45.72 | 48.28 |
| 06  | 12.70 | 15.26 | 20  | 48.26 | 50.82 |
| 07  | 15.24 | 17.80 | 21  | 50.80 | 53.36 |
| 08  | 17.78 | 20.34 | 22  | 53.34 | 55.90 |
| 09  | 20.32 | 22.88 | 23  | 55.88 | 58.44 |
| 10  | 22.86 | 25.42 | 24  | 58.42 | 60.98 |
| 11  | 25.40 | 27.96 | 25  | 60.96 | 63.52 |
| 12  | 27.94 | 30.50 | 26  | 63.50 | 66.06 |
| 13  | 30.48 | 33.04 | 27  | 66.04 | 68.60 |
| 14  | 33.02 | 35.58 | 28  | 68.58 | 71.14 |
| 15  | 35.56 | 38.12 | 29  | 71.12 | 73.68 |

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. 05450  
 APPROVED BY EMILY  
 CHECKED BY HZF  
 DRAWING BY HAO  
 SCALE NONE  
 REV. A4  
 UNIT mm  
 UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.35 .XX ±0.10 ANG.

| NO.  | REV. | REVISIONS   | CHK | DATE       |
|------|------|-------------|-----|------------|
| △ A4 |      | Modify Dim. | HZF | 05/06/2015 |
| △ A3 |      | Modify Data | HZF | 08/27/2013 |
| △ A2 |      | Modify Data | HZF | 09/09/2010 |
| △ A1 |      | Modify Data | HZF | 11/18/2008 |
| △ A0 |      | NEW RELEASE | HZF | 04/11/2006 |