


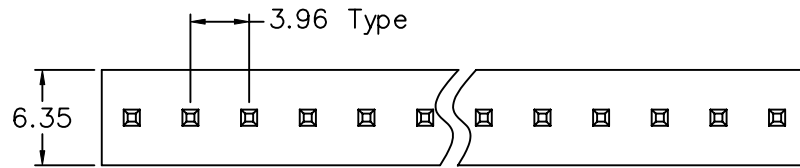


SPECIFICATION

Current Rating: 5A AC/DC  
 Voltage Rating: 250V AC/DC  
 Operating Temp: -25°C ~ +85°C  
 Insulation Resistance: 1000 Megaohms Min.  
 Dielectric Withstanding Voltage: 1500V AC/min.  
 Contact Resistance: 10 Milliohms Max.  
 Material: Nylon66 UL94V-2  
 RoHS Compliant



PCB Layout Component Side

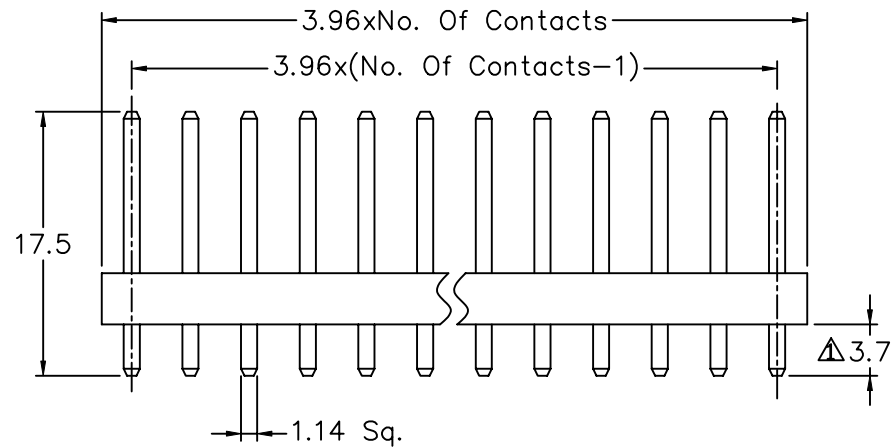

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.

05507

APPROVED BY

MEI

CHECKED BY

BECKY

DRAWING BY

LXH

UNLESS OTHERWISE SPECIFIED

TOLERANCES ARE

.X ±0.5

.XX ±0.35

AWG.

SCALE


NONE

REV.

A1

UNIT

mm



NO. REV.

REVISIONS

CHK

DATE

△ A1

Modify Dim. 3.6 → 3.7

MEI

2004/03/17

△ A0

NO.

REVISIONS

CHK

DATE