
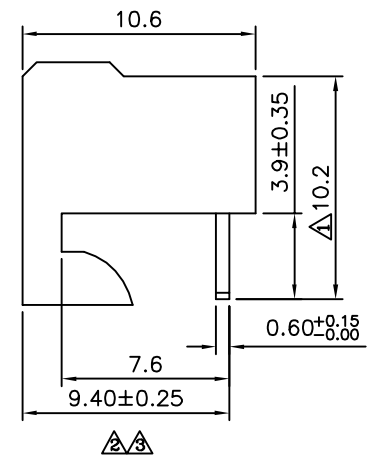
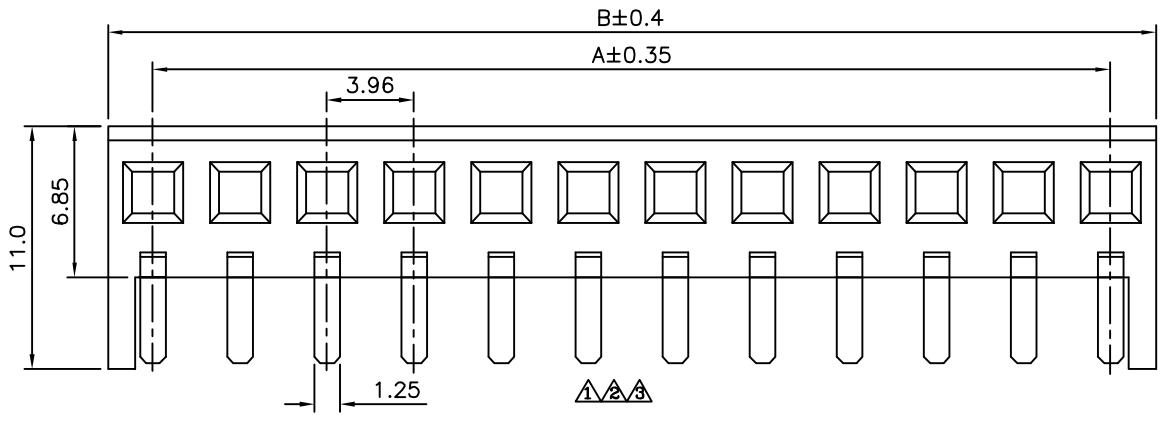


△△ SPECIFICATION
 Current:5A Max.
 Voltage:250V AC Max.
 Insulation Resistance:1000 Megohms Min.
 Contact Resistance:10 Milliohms Max.
 Dielectric Withstanding Voltage:1500V AC
 △ Non Operating Temperature:0°C~+75°C
 Insulator:PA66(UL94V-2),White
 Contact:Brass,Tin Plated Over Nickel
 RoHS Compliant

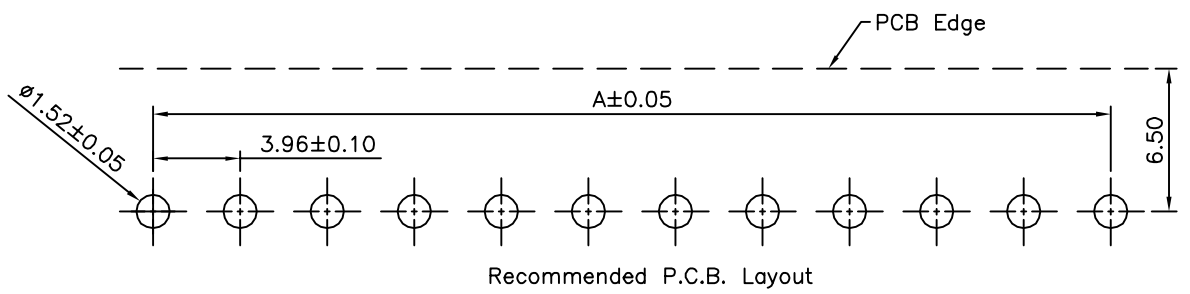

| Pin | A | B |
|-----|-------|-------|
| 02 | 3.96 | 8.06 |
| 03 | 7.92 | 12.02 |
| 04 | 11.88 | 15.98 |
| 05 | 15.84 | 19.94 |
| 06 | 19.80 | 23.90 |
| 07 | 23.76 | 27.86 |
| 08 | 27.72 | 31.82 |
| 09 | 31.68 | 35.78 |
| 10 | 35.64 | 39.74 |
| 11 | 39.60 | 43.70 |
| 12 | 43.56 | 47.66 |
| 13 | 47.52 | 51.62 |
| 14 | 51.48 | 55.58 |
| 15 | 55.44 | 59.54 |
| 16 | 59.40 | 63.50 |

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

| | | | | |
|-------------|------|-------------|-----|---|
| DRAWING No. | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.35 .XX ±0.10 ANG |
| 05530 | | MEI | | |
| | | CHECKED BY | HZF | |
| | | DRAWING BY | CYP | |
| SCALE | NONE | REV. | B3 | UNIT mm |

| | | | |
|----------|-------------|-----|------------|
| △ B3 | Modify Data | HZF | 04/09/2015 |
| △ B2 | Modify Data | HZF | 02/26/2013 |
| △ B1 | Modify Data | HZF | 12/25/2009 |
| △ B0 | NEW RELEASE | HZF | 10/05/2008 |
| NO. REV. | REVISIONS | CHK | DATE |