


Recommended P.C.B. Layout

SPECIFICATION

Current Rating:2A AC/DC
 Voltage Rating:500V AC/DC
 Contact Resistance:20 Milliohms Max. Before Test
 Or 40 Milliohms After Test
 Insulation Resistance:500 Megaohms Min. At 500V DC
 Dielectric Withstanding Voltage:500V AC/Minute
 Temperature Range:-55°C To +85°C
 Applicable:Battery CR2032
 Insulator:LCP(UL94V-0),White
 Contact:Phosphor Bronze,Gold Flash Over All,
 Over Nickel
 RoHS Compliant

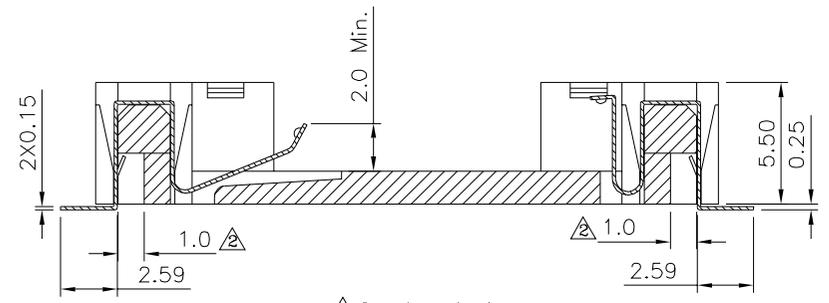

Section A-A

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 .XX ±0.20 .XXX ±0.10 ANG. ±3°
05580		EMILY		
		CHECKED BY		
HZF		CYP		
DRAWING BY		REV.	B3	UNIT
SCALE	NONE			mm

NO.	REV.	REVISIONS	CHK	DATE
△3	B3	Modify Data	HZF	11/07/2025
△2	B2	Modify Data	HZF	01/10/2020
△1	B1	Modify Data	HZF	03/31/2015
△0	B0	NEW RELEASE	HZF	05/07/2013