

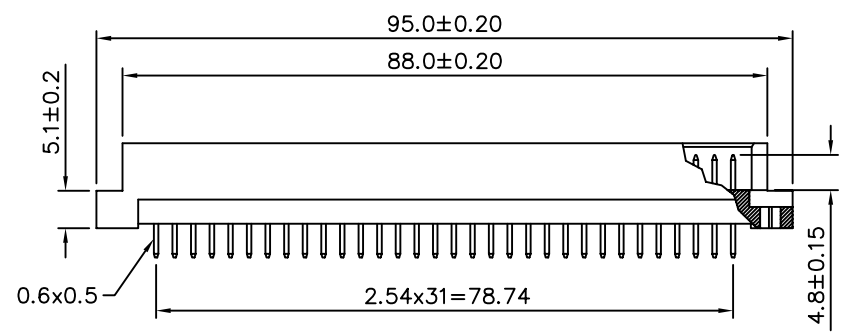
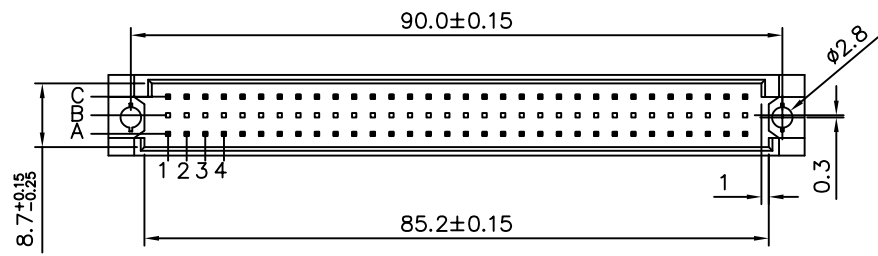


**SPECIFICATIONS**

Current Rating: 2 Amp  
 Dielectric Withstanding Voltage: AC 1000V For 1 Minute  
 Insulator Resistance: 1000 Megohms Min. At DC 500V  
 Contact Resistance: 30 Milliohms Max. At DC 100mA  
 Operating Temperature: -55°C~+105°C  
 Housing: 30% Glass Filled PBT, UL 94V-0  
 Contact: Brass, Gold(2~3u"/)/Tin(80~100u")

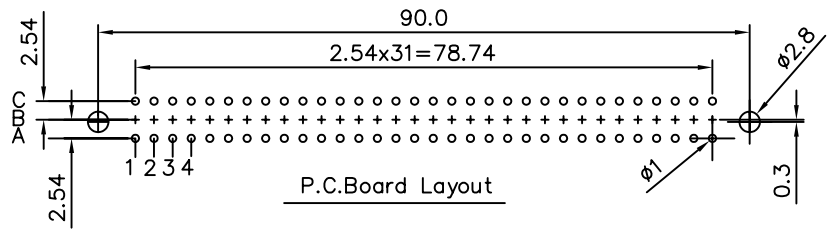

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.25 .XX ±0.10 ANG. ±5°
05616		MEI		
		CHECKED BY		
		BECKY		
		DRAWING BY		UNIT mm
		HZF		
SCALE	NONE	REV.	A1	

NO.	REV.	REVISIONS	CHK	DATE
△	A1	Modify Data	BECKY	08/03/2006
△	A0	NEW RELEASE	BECKY	04/06/2005