

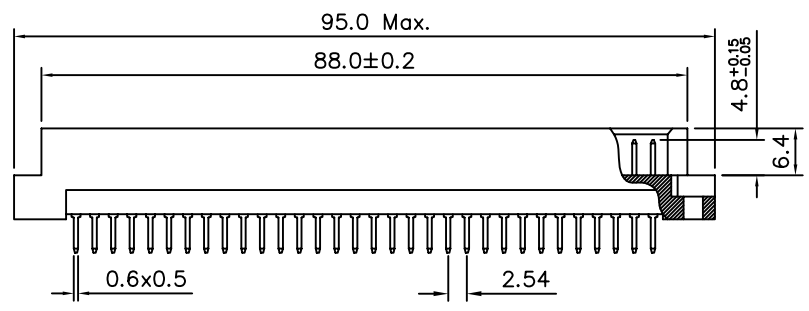


SPECIFICATIONS
 Current Rating: 2 Amp
 Dielectric Withstanding Voltage: 1000V AC For 1 Minute
 Insulator Resistance: 1000 Megohms Min. At DC 500V
 Contact Resistance: 30 Milliohms Max. At DC 100mA
 Operating Temperature: -55°C~+105°C
 Insulator: 30% Glass Filled PBT UL 94V-0
 Contact: Phosphor Bronze

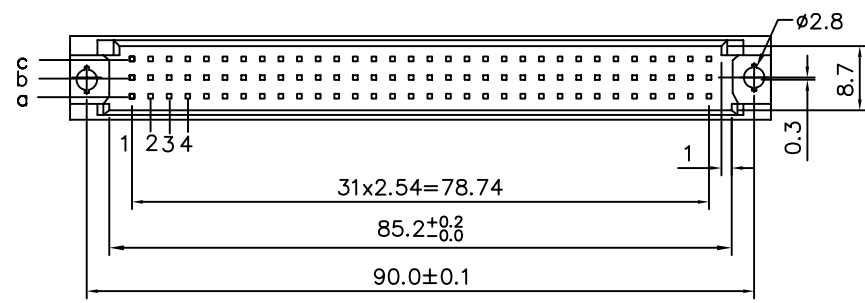

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.5 .X ±0.25 .XX ±0.13					
05617		MEI							
		CHECKED BY							
		BECKY							
		DRAWING BY							
		HZF							
SCALE	NONE	REV.	A0	UNIT	mm	NO. REV.	REVISIONS	CHK	DATE
						△ A0	NEW RELEASE	BECKY	07/15/2005