



Section A-A

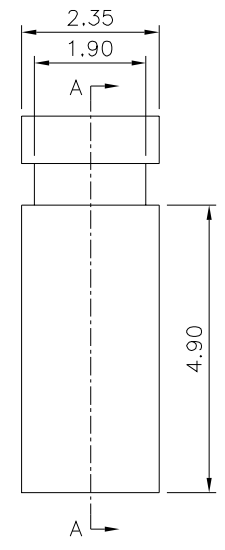

A

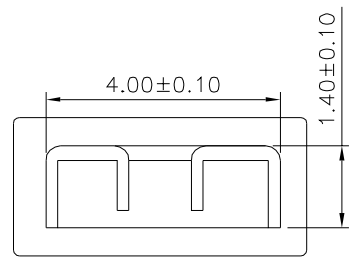

△△ SPECIFICATION

Current Rating:1.0 Amp
 Voltage Rating:30V RMS Max.
 Dielectric Withstanding Voltage:500V AC Min. For 1 Minute
 Insulator Resistance:500 Megaohms Min. At 500V DC
 Contact Resistance:20 Milliohms Max.
 Operating Temperature:-45°C~+105°C
 Insulator:PBT+15%G.F.(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.35 .XX ±0.20 .XXX ±0.10 ANG. ±2°
05725		MEI		
		CHECKED BY HZF		
DRAWING BY		CYP		UNIT
SCALE	NONE	REV.	A2	mm

NO.	REV.	REVISIONS	CHK	DATE
△2	A2	Modify Data	HZF	12/09/2019
△1	A1	Modify Data	HZF	10/21/2014
△0	A0	NEW RELEASE	HZF	02/13/2008