



△△△ SPECIFICATION

Current Rate:3 Amp
 Withstand Voltage:500V AC For 1 Minute
 Contact Resistance:20 Milliohms Max.
 At DC 100mA
 Insulation Resistance:5000 Megaohms Min.
 At 500V DC
 Housing:PBT+30%G.F.(UL94-V0)
 Contact:Brass,Gold Flash Over Nickel
 Operating Temperature:-55°C~+105°C
 RoHS Compliant


Insulator Color	P/N
Blue	05726
Green	10208
Red	05729
White	05727
Yellow	05730



△

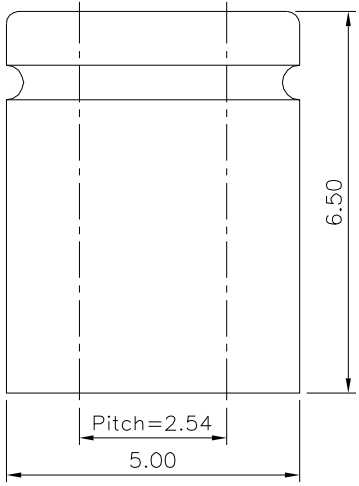

△△

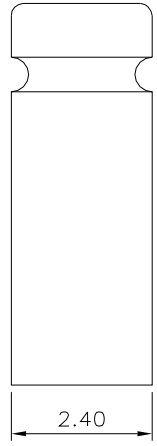

△

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △△
 05726

APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.30
 .XX ±0.20
 ANG. ±3° △

NO.	REV.	REVISIONS	CHK	DATE
△	A4	Modify Data	HZF	12/05/2019
△	A3	Modify Data	HZF	07/18/2017
△	A2	Modify Data	HZF	10/16/2013
△	A1	Modify Data	HZF	12/15/2009
△	A0	NEW RELEASE	MEI	06/02/1999