

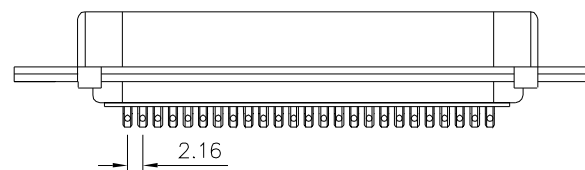
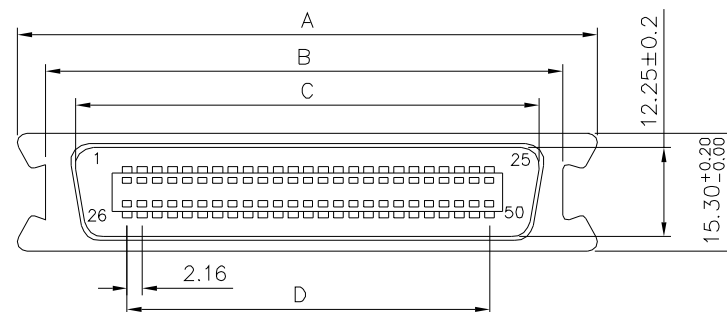


△△ SPECIFICATION

Current Rating: 1A Max.
 Dielectric Withstanding Voltage: 750V AC For 1 Minute
 Contact Resistance: 30 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Total Mating Force: 9.0 Kgf Max.
 Total Unmating Force: 5.0 Kgf Min.
 Temperature Range: -55°C~+85°C
 Insulator: PBT+G.F.(UL94V-0), Black
 Contact: Brass, Gold Flash On Contact Area, Tin
 Plated On Solder Tails, Over Nickel
 Shell: SPCC, Nickel Plated
 RoHS Compliant

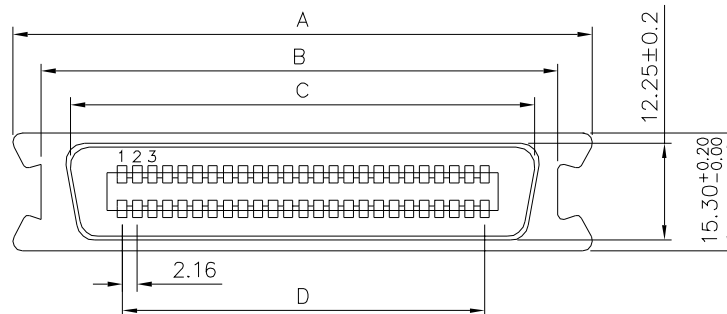

△△	Circuits	A±0.25	B±0.2	C±0.2	D±0.1
	36	62.0	53.5	49.35	36.72
	50	77.4	68.3	64.47	51.84

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △

05757


APPROVED BY MEI

CHECKED BY HZF

DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.3
 .XX ±0.20
 ANG. ±1°

UNIT mm



△	A4	Modify Data	HZF	10/08/2018
△	A3	Modify Data	HZF	08/29/2018
△	A2	Modify Data	HZF	04/22/2010
△	A1	DEL 14Pin	HZF	12/19/2008
△	A0	NEW RELEASE	BECKY	2004/09/29
NO.	REV.	REVISIONS	CHK	DATE