
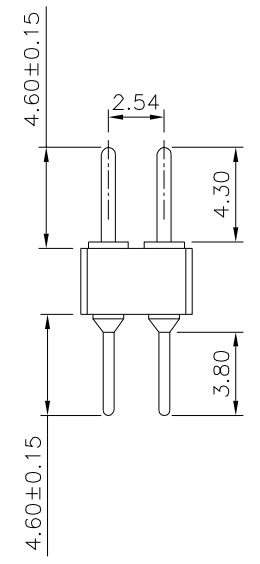
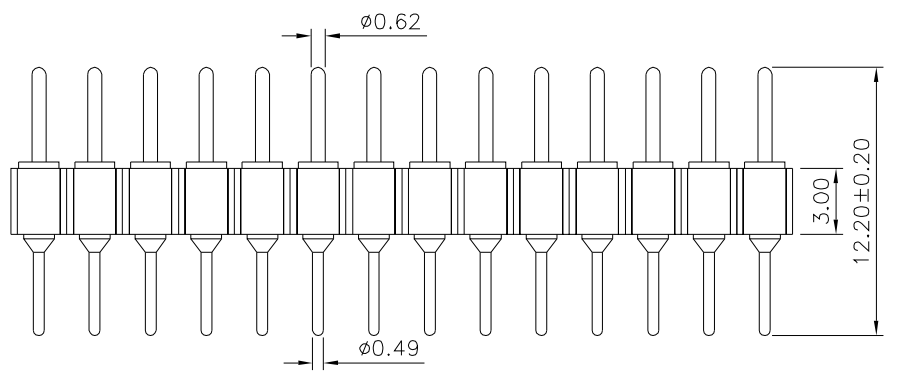


**SPECIFICATION**  
 Current Rating: 3 Amps/Contact Max.  
 Contact Resistance: 4 Milliohms Max./Contact  
 Insulation Resistance: 1000 Megohms Min. At 100V  
 Operation Voltage: 60V AC/DC  
 Operation Temperature: -55°C~+105°C  
 Contact: Brass  
 Gold Flash Over All, Over Nickel  
 Insulator: PPS(UL94V-0), Black  
 RoHS Compliant

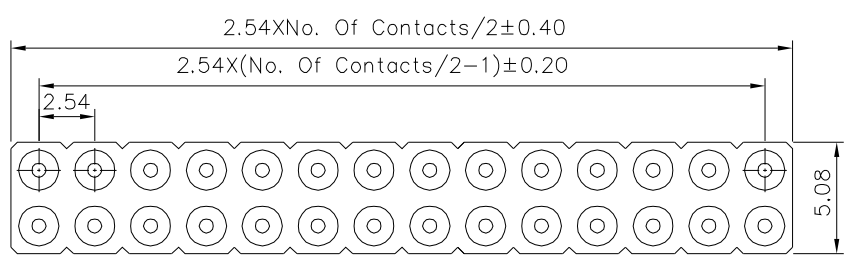

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X ±0.50 XX ±0.30 XXX ±0.20 .XXX ±0.10 ANG. ±5°
05871		MEI		
		CHECKED BY		
		HZF		
		DRAWING BY		UNIT mm
		CYP		
SCALE	NONE	REV.	B0	NO. REV.

△	B0	Modify Data	HZF	07/30/2017
△	B0	NEW RELEASE	HZF	07/30/2017
			CHK	DATE