
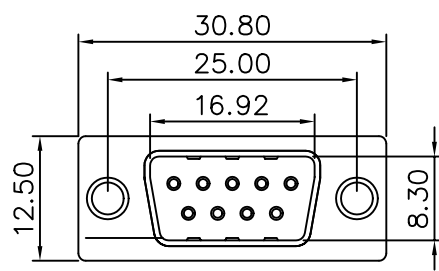
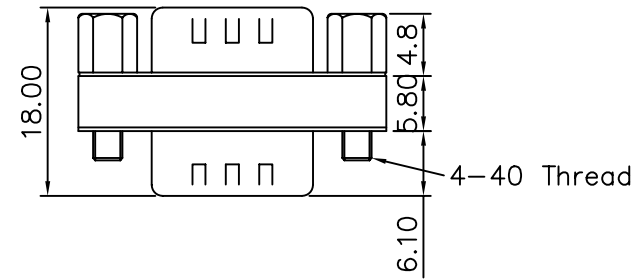


SPECIFICATIONS :

Current Rating : 5 AMP
 Dielectric Strength : 1000V For One Minute
 Insulation Resistance : 1000 Megohms Min At 500V DC
 Temperature : -55°C To +105°C
 Shell: Steel, Zinc Plated Or Tin Plated
 Pin Contact : Gold Plated Over Nickel
 Insulator: PBT Glass Fibre Reinforced
 UL 94V-0

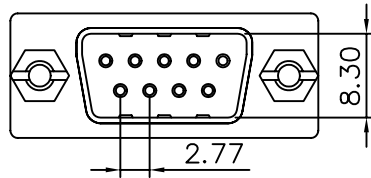

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 05977


APPROVED BY MEI
 CHECKED BY RAN
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 AWG.

SCALE NONE

REV. A

UNIT mm



AREA	REVISIONS	CHK	DATE
------	-----------	-----	------