
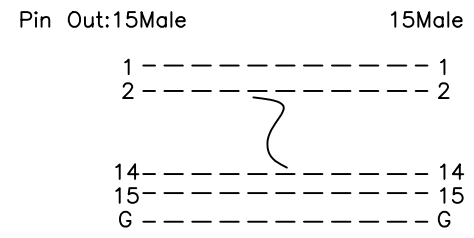


SPECIFICATIONS :
 Current Rating : 3AMP
 Dielectric Strength : 1000V For 1 Minute
 Insulator Resistance : 1000 Megohms Min.
 At DC 500V
 Temperature : -55°C To +105°C
 Shell : Tin Plated Shell
 Contact : Brass Gold Plated Over Nickel
 Insulator : PBT Glass Fibre Reinforced UL 94V-0

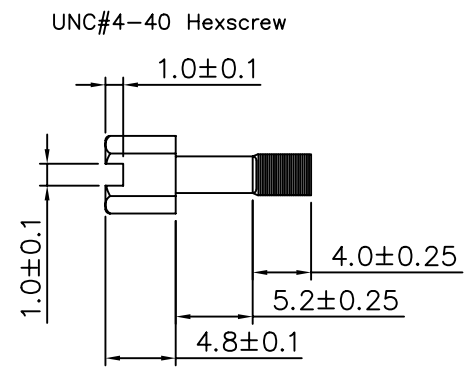

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 AWG.
05978		MEI		
		CHECKED BY		
		RAN		
		DRAWING BY		
		HZF		
SCALE	NONE	REV.	A	UNIT
				mm

AREA	REVISIONS	CHK	DATE