
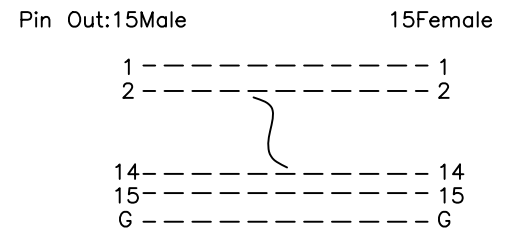


**SPECIFICATIONS :**  
 Current Rating : 3AMP  
 Dielectric Strength : 1000V For 1 Minute  
 Insulator Resistance : 1000 Megohms Min.  
 At DC 500V  
 Temperature : -55°C To +105°C  
 Shell : Tin Plated Shell  
 Contact : Brass Gold Plated Over Nickel  
 Insulator : PBT Glass Fibre Reinforced UL 94V-0

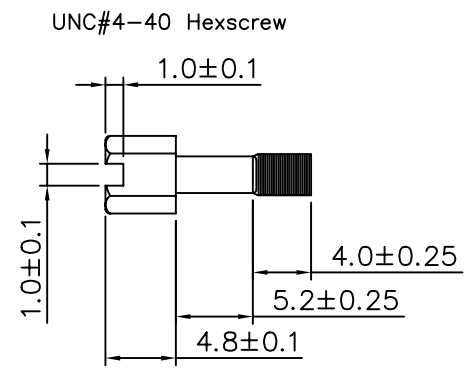

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 AWG.
05983		MEI		
		CHECKED BY		
		RAN		
		DRAWING BY		
		HZF		
SCALE	NONE	REV.	A	UNIT
				mm

AREA	REVISIONS	CHK	DATE