





△ SPECIFICATION
 Current Rating: 2 Amp
 Dielectric Withstanding Voltage: 1000V AC For 1 Minute
 Insulation Resistance: 1000 Megaohms Min. At DC 500V
 Contact Resistance: 20 Milliohms Max. At DC 100mA
 Operation Temperature: -55°C ~ +125°C
 Housing: PBT+30%G.F. (UL94V-0)
 Contacts: Phosphor Bronze
 Gold Flash On Contact Area, Tin Plated On Solder Tails, Over Nickel
 RoHS Compliant

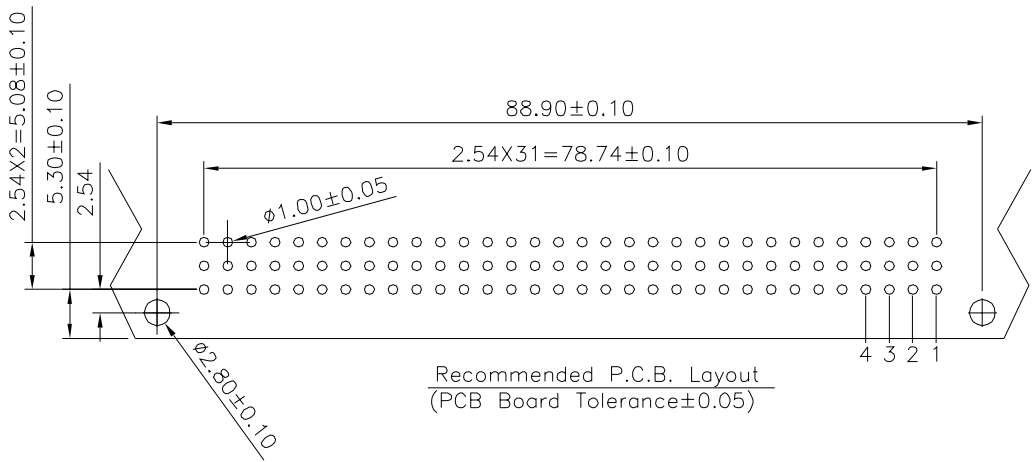

Recommended P.C.B. Layout
 (PCB Board Tolerance ±0.05)

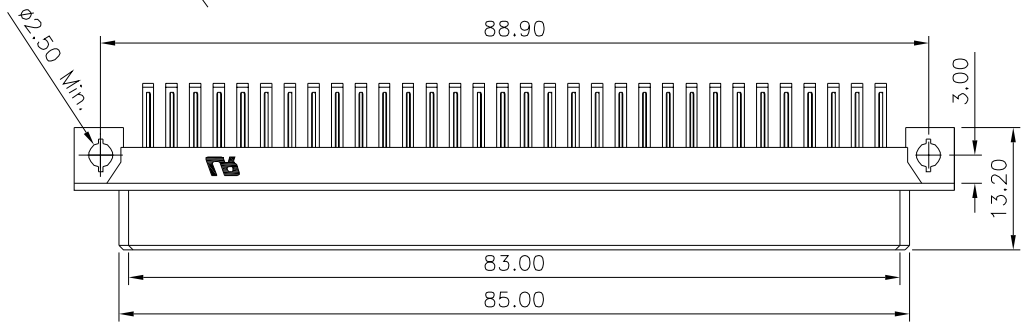

06077	2.54mm	64	a - c	
05624		96	a b c	

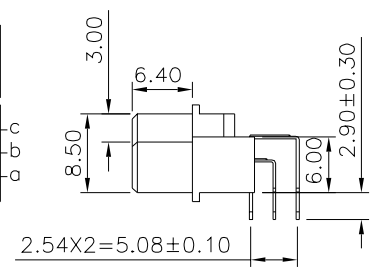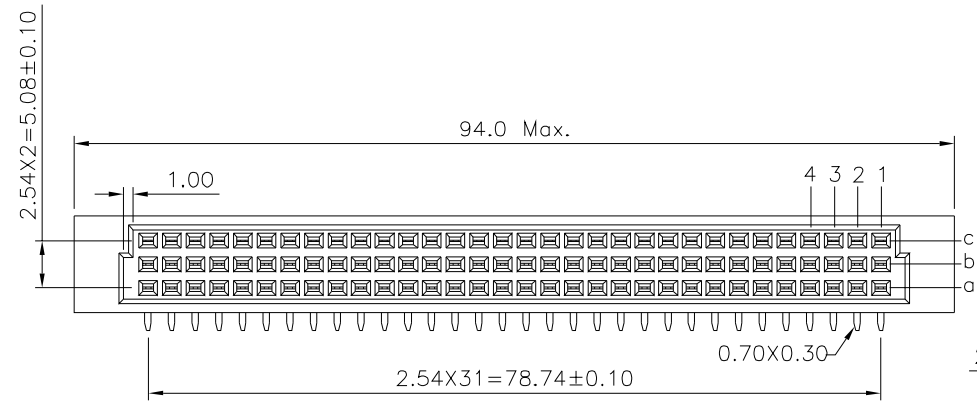

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.5 .X ±0.25 .XX ±0.15
06077		MEI		
		CHECKED BY		
SCALE NONE		HZF		
		DRAWING BY		
REV. A1		CYP		UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	03/14/2018
△ A0		NEW RELEASE	HZF	07/12/2009