
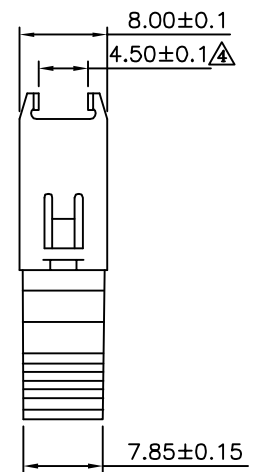
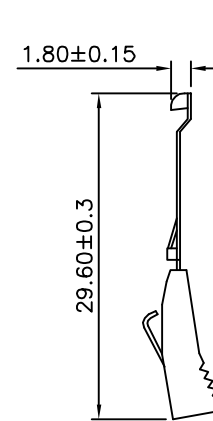



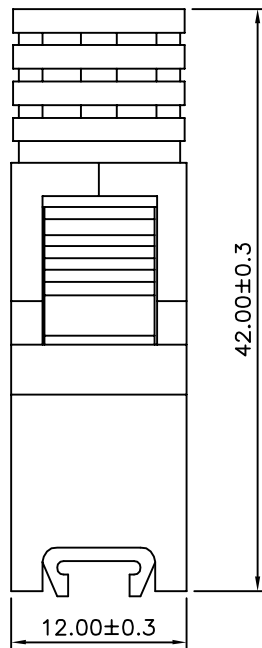
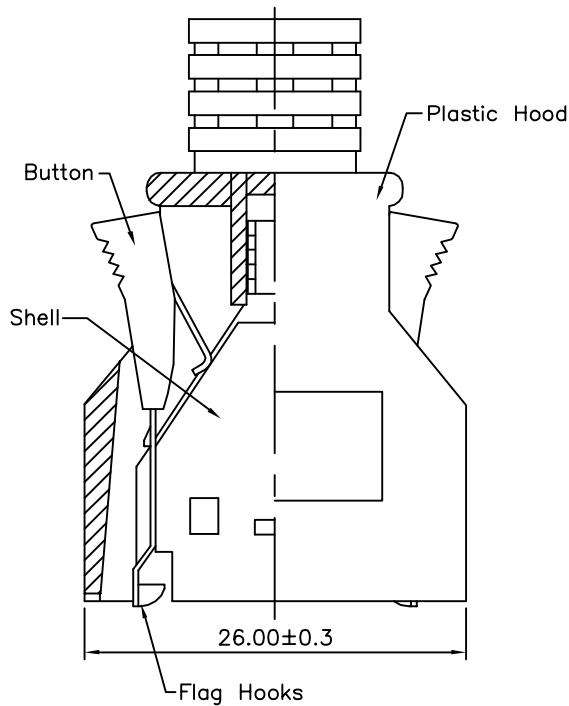
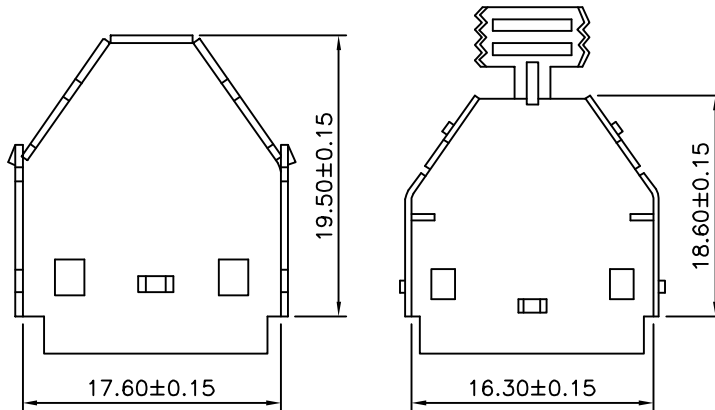


△ SPECIFICATION
 Current Rating:0.5 Amp
 Withstand Voltage:500V AC
 Contact Resistance:35 Milliohms Max.
 Insulation Resistance:>500 Megaohms Min.
 Operation Temperature:-55°C~+85°C
△ Insulator:PBT(UL94V-0),Black
 Contact:Phosphor Bronze
 Selective Gold Plated 5u" Over Nickel
 Front Shell:Steel,Nickel Plated Over Copper
△ Hood:ABS(UL94V-0),Beige
 Latch Cover:ABS(UL94V-0),Beige
 Latch:Stainless Steel
 Inner Shell:Steel,Nickel Plated Over Copper
 RoHS Compliant

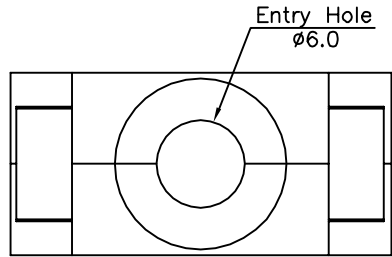

Flag Hooks

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 06078

APPROVED BY
 EMILY
 CHECKED BY
 HZF
 DRAWING BY
 GAO

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG.

SCALE NONE

REV. A4

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
A4		Modify Data	HZF	03/06/2013
A3		Modify Data	HZF	02/04/2013
A2		Modify Data	HZF	10/13/2010
A1		Add Color	HZF	09/28/2010
A0		NEW RELEASE	HZF	05/19/2009