

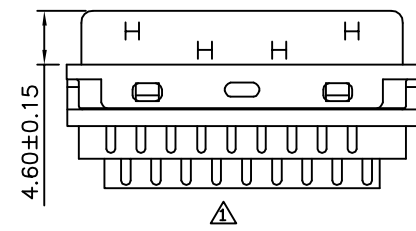
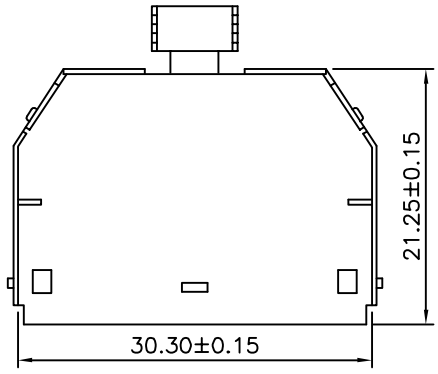
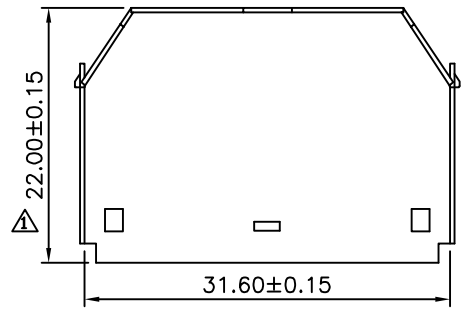


△ SPECIFICATION
 Current Rating:0.5 Amp
 Dielectric Withstanding Voltage:500V AC
 Contact Resistance:35 Milliohms Max.
 Insulation Resistance:>500 Megaohms Min.
 Operation Temperature:-55°C~+85°C
 Insulator:PBT(UL94V-0),Black
 Contact:Phosphor Bronze,Selective Gold Plated
 5u" Over Nickel
 Front Shell:Steel,Nickel Plated Over Copper
 △ Hood:ABS(UL94V-0),Beige
 △ Latch Cover:ABS(UL94V-0),Beige
 Latch:Stainless Steel
 Inner Shell:Steel,Nickel Plated Over Copper
 RoHS Compliant

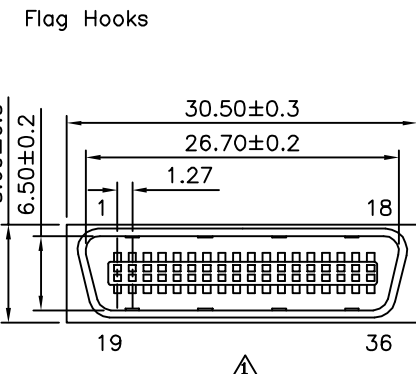

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

| | | | | |
|-------------|------|-------------|------|---|
| DRAWING No. | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X \pm 0.38 .XX \pm 0.25 ANG. UNIT mm |
| 06085 | | MEI | | |
| | | CHECKED BY | HZF | |
| | | DRAWING BY | SONG | |
| SCALE | NONE | REV. | A2 | |

| | | | | |
|------|------|-------------|-----|------------|
| NO. | REV. | REVISIONS | CHK | DATE |
| △ A2 | | Modify Data | HZF | 03/15/2013 |
| △ A1 | | Modify Data | HZF | 12/07/2012 |
| △ A0 | | NEW RELEASE | HZF | 02/07/2008 |