

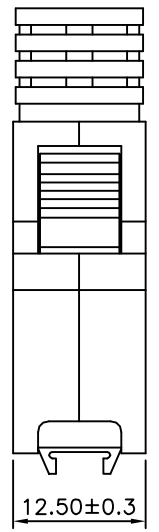
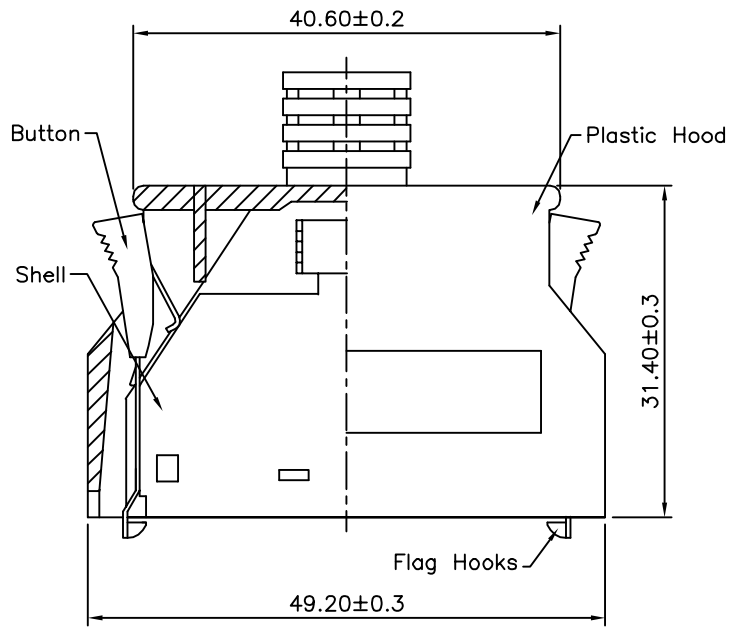



**△ SPECIFICATION**  
 Current Rating: 0.5 Amp  
 Dielectric Withstanding Voltage: 500V AC  
 Contact Resistance: 35 Milliohms Max.  
 Insulation Resistance: >500 Megaohms Min.  
 Operation Temperature: -55°C ~ +85°C  
 Insulator: PBT(UL94V-0), Black  
 Contact: Phosphor Bronze, Selective Gold Plated  
 5u" Over Nickel  
 Front Shell: Steel, Nickel Plated Over Copper  
 △ Hood/Latch Cover: ABS(UL94V-0)  
 06087 : Beige Color  
 15793 : Black Color  
 Latch: Stainless Steel  
 Inner Shell: Steel, Nickel Plated Over Copper

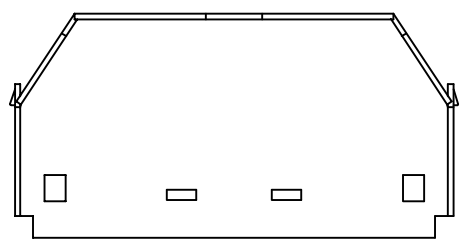


Flag Hooks

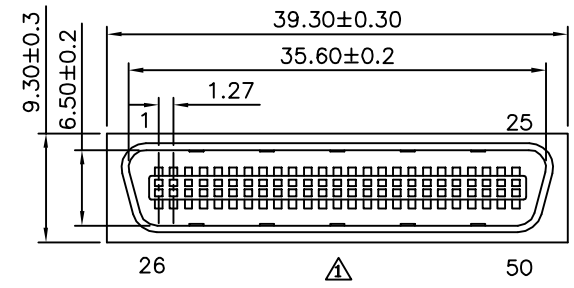


△△ Upper Cover

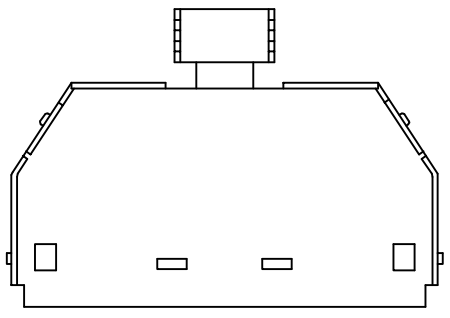

△ Lower Cover

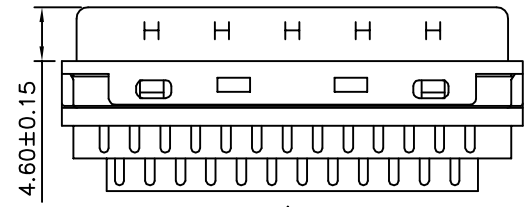

△



△

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG.
06087		MEI		
		CHECKED BY	HZF	
		DRAWING BY	HAO	
SCALE	NONE	REV.	B3	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△	B3	Modify Data	HZF	09/05/2015
△	B2	Modify Data	HZF	03/06/2013
△	B1	Modify Data	HZF	12/06/2012
△	B0	NEW RELEASE	HZF	12/02/2009