
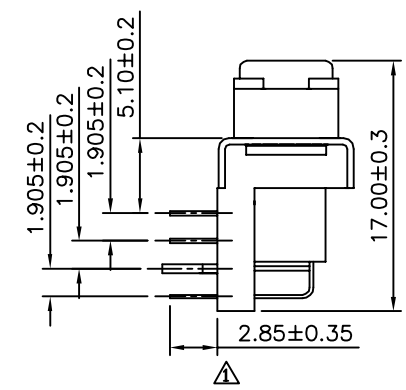
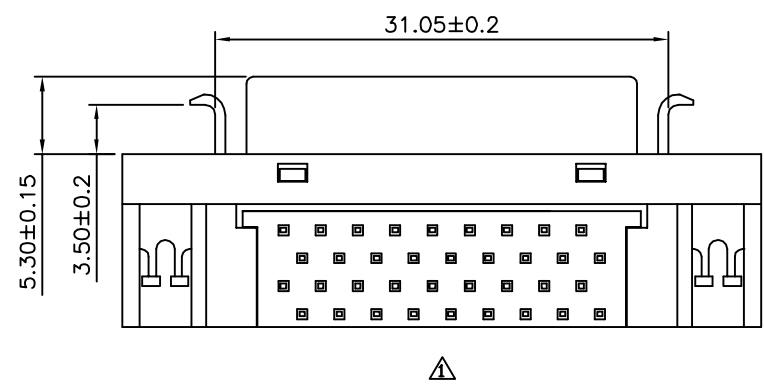


**△ SPECIFICATION**  
 △ Contact Current Rating:0.5 Amp  
 Dielectric Withstanding Voltage:500V AC  
 Contact Resistance:35 Milliohms Max.  
 Insulation Resistance:>500 Megaohms Min.  
 Operation Temperature:-55°C~+85°C  
 Housing And Cover:PBT(UL94V-0),Black  
 △ Contacts:Phosphor Bronze,Selective Gold Plated 5u"  
 Over Nickel  
 Front Shell:Steel,Nickel Plated Over Copper  
 Bracket:Steel,Nickel Plated Over Copper  
 Boardlock:Brass,Tin Plated Over Copper  
 RoHS Compliant

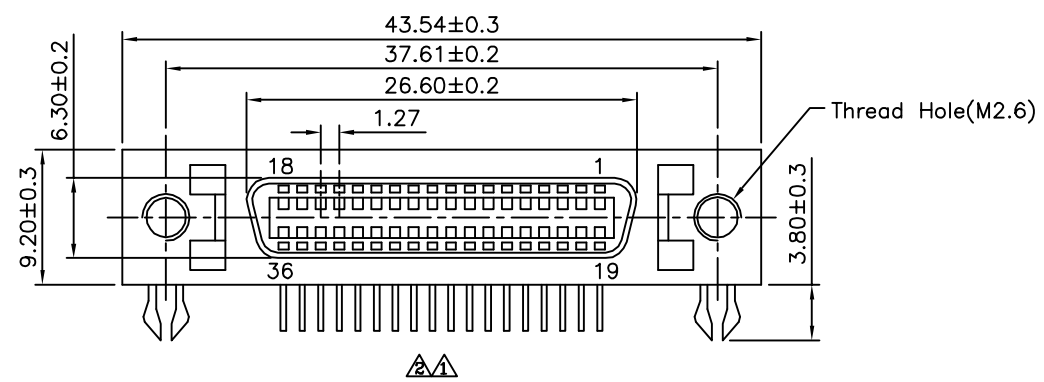

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG.
06101		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		UNIT mm
		SONG		
SCALE	NONE	REV.	A2	NO.REV.

△ A2	Modify Data	HZF	09/06/2013
△ A1	Modify Data	HZF	04/19/2011
△ A0	NEW RELEASE		
NO.REV.	REVISIONS	CHK	DATE