


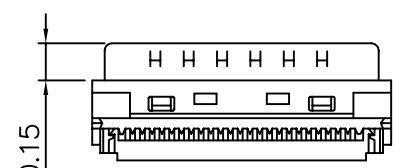
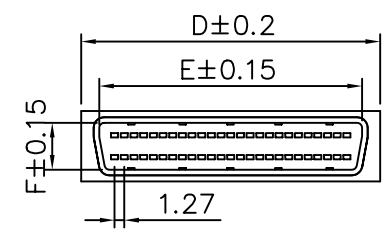





**SPECIFICATION**

Current Rating: 1A  
 Insulation Resistance : 500 Megohms/Min.  
 Withstanding Voltage : 500V AC/RMS For 1 Minute  
 Contact Resistance : 35 Milliohms Max.  
 Temperature Range : -55°C To +105°C  
 Housing And Cover: Plastic Thermoplastic  
 P.B.T UL 94V-0  
 Contact: Phosphor Bronze Gold Selective Plated  
 Front Shell : Steel, Nickel Plated Over Copper  
 Back Shell: Zinc Plated Nickel Over Copper  
 Jackscrew : Steel Nickel Plated Over Copper  
 Screw : Steel Nickel Plated Over Copper  
 Cable Clipper: Steel Nickel Plated



Circuits	A	B	C	D	E	F	G	H	I	J
40	30.95	31.85	27.75	32.95	28.50	5.70	24.90	46.60	38.70	20.30
50	37.30	39.20	34.10	39.30	34.85	5.70	31.80	53.10	38.20	19.80
68	48.70	50.73	45.53	50.60	43.35	5.80	42.40	63.80	38.20	19.80

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.  
 06112

APPROVED BY MEI  
 CHECKED BY RAN  
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED  
 TOLERANCES ARE  
 .X ±0.38  
 .XX ±0.25  
 AWG.

SCALE NONE

REV. A

UNIT mm

AREA REVISIONS CHK DATE