
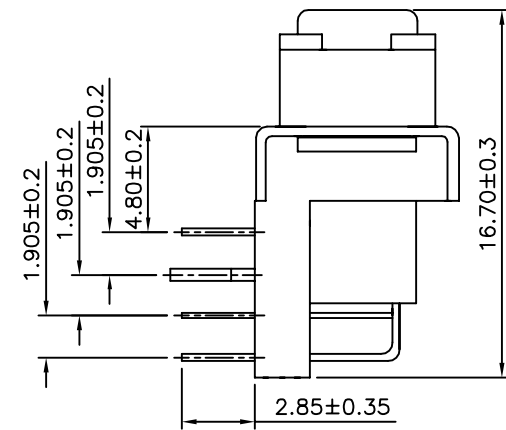
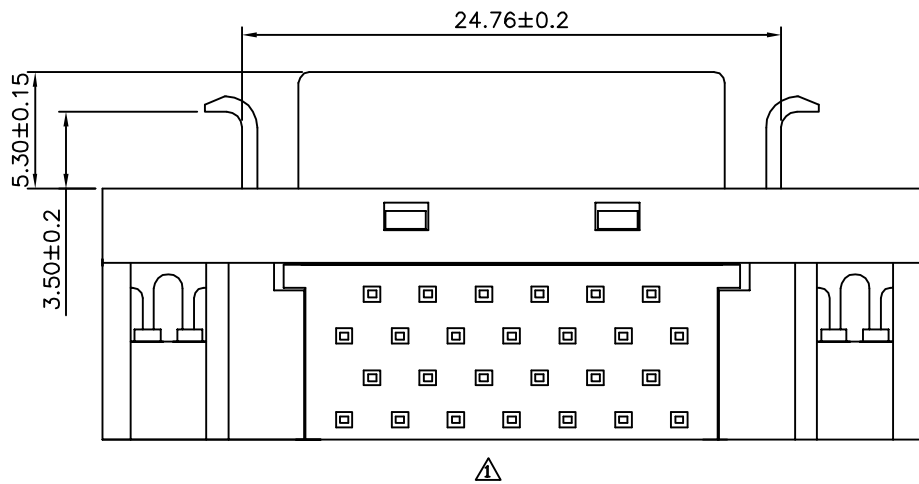
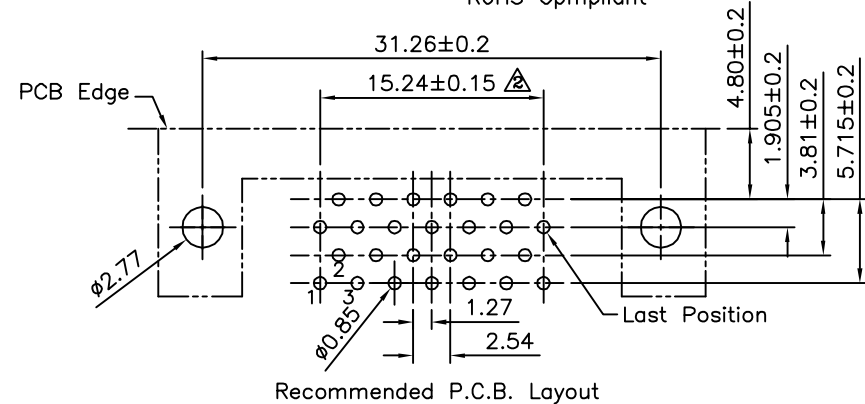


△ SPECIFICATION

Contact Current Rating:0.5A
 Dielectric Withstanding Voltage:500V AC
 Insulation Resistance:>500 Megohms Min.
 Contact Resistance:35 Milliohms Max.
 Operation Temperature:-55°C~+85°C
 Housing And Cover:PBT(UL94V-0),Black
 Contact:Phosphor Bronze
 Selective Gold Plated 5u" Over Nickel
 Front Shell:Steel,Nickel Plated Over Copper
 Bracket:Steel,Nickel Plated Over Copper
 Boardlock:Brass,Tin Plated Over Copper
 RoHS Cmpliant

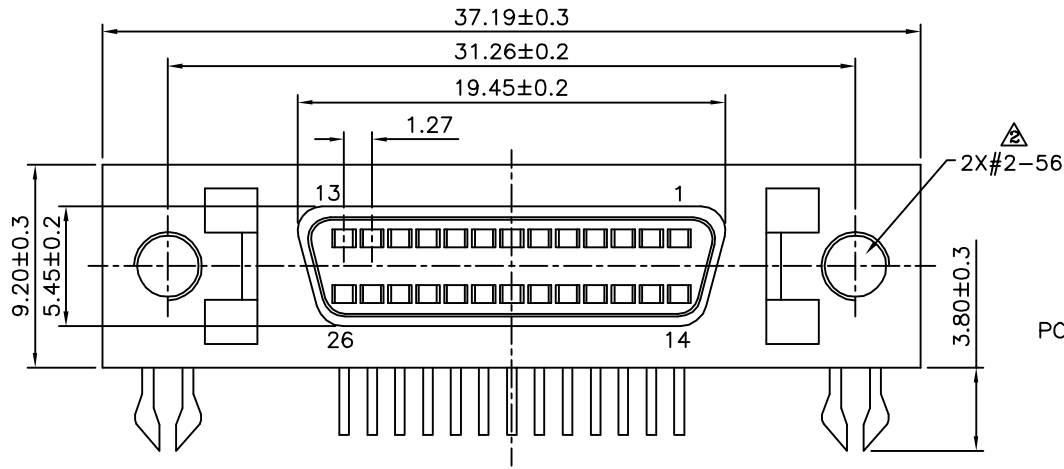

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

06115

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ± 0.38
 .XX ± 0.25
 ANG.


SCALE

NONE

REV.

A2

UNIT
 mm



NO. REV.

REVISIONS

CHK

DATE

△ A2	Modify Data	HZF	04/02/2012
△ A1	Modify Data	HZF	08/18/2011
△ A0	NEW RELEASE	HZF	09/18/2010