
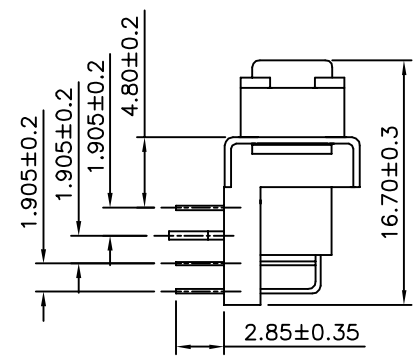
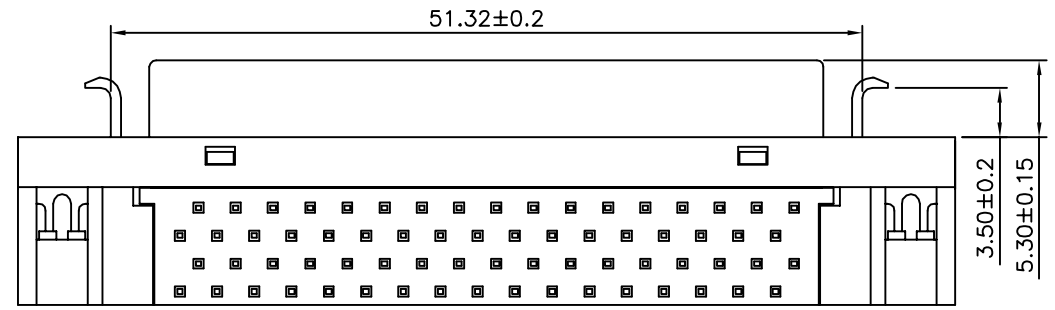


SPECIFICATION
 Contact Current Rating:1 Amp
 Dielectric Withstanding Voltage:500V AC
 Insulation Resistance:>500 Megaohms Min.
 Contact Resistance:35 Milliohms Max.
 Operation Temperature:-55°C~+105°C
 Housing And Cover:PBT(UL94V-0),Black
 Contact:Phosphor Bronze,Selective Gold Plated 5u"
 Front Shell:Steel,Nickel Plated Over Copper
 Bracket:Steel,Nickel Plated Over Copper
 Boardlock:Brass,Tin Plated Over Copper
 RoHS Cpmpliant

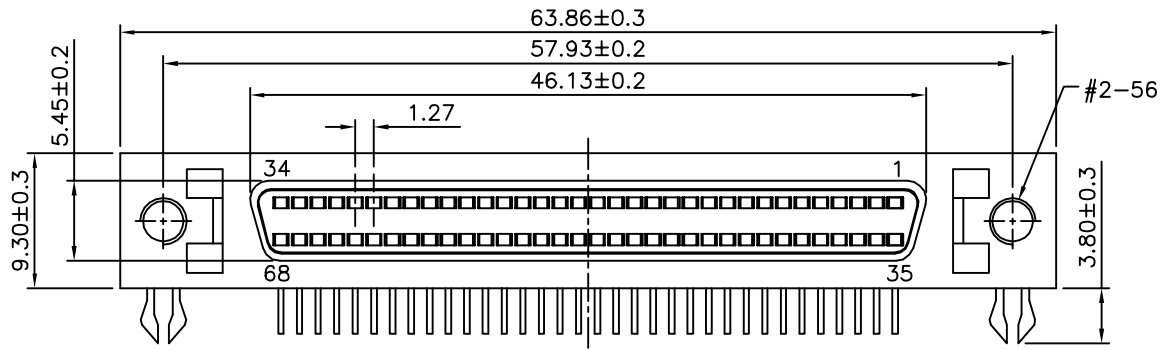

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25
06117		MEI		
		HZF		
		DRAWING BY		
		WZL		
SCALE	NONE	REV.	A0	UNIT mm

NO.	REV.	DESCRIPTION	CHK	DATE
△ A0		NEW RELEASE	HZF	09/23/2010
		REVISIONS		