
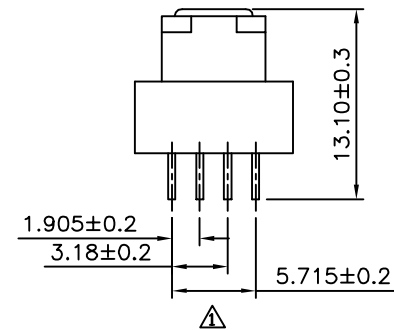
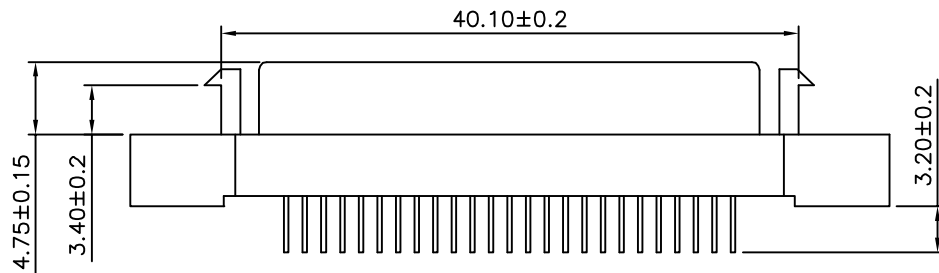


Δ Recommended P.C.B. Layout

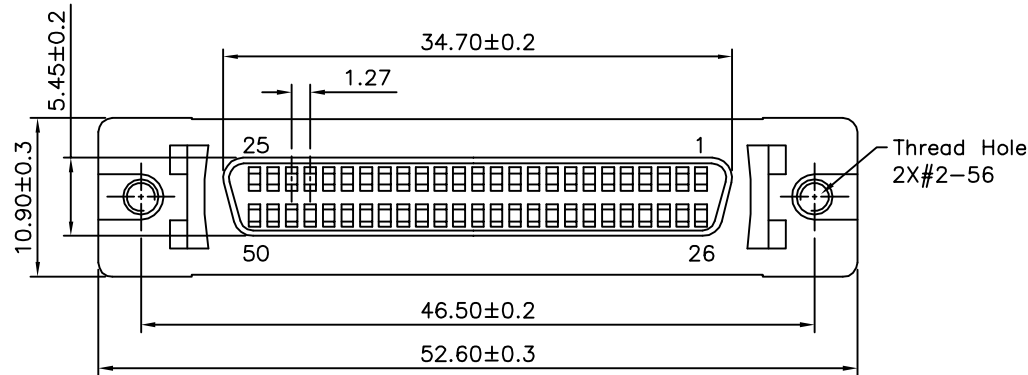

Δ SPECIFICATION

Current Rating: 0.5 Amp
 Withstanding Voltage: 500V AC
 Insulation Resistance: >500 Megaohms Min.
 Contact Resistance: 35 Milliohms Max.
 Operation Temperature: -55°C~+85°C
 Housing: PBT(UL94V-0), Black
 Contact: Phosphor Bronze,
 Gold Plated 5u" On Contact Area,
 Tin Plated On Solder Tails, Over Nickel
 Bracket: Zinc Alloy, Nickel Plated Over Copper
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 06118

APPROVED BY
 EMILY
 CHECKED BY
 HZF
 DRAWING BY
 SONG

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG.

SCALE NONE REV. A3

UNIT mm

Δ A3	Modify Data	HZF	05/15/2014
Δ A2	Modify Data	HZF	03/19/2012
Δ A1	Modify Data	HZF	01/05/2011
Δ A0	NEW RELEASE	SHIN	03/17/2008
NO. REV.	REVISIONS	CHK	DATE