
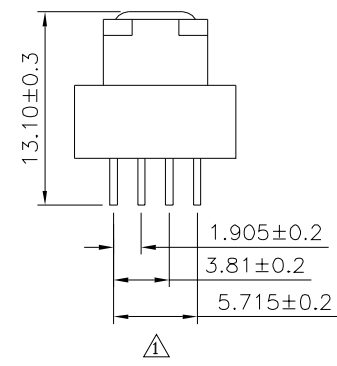
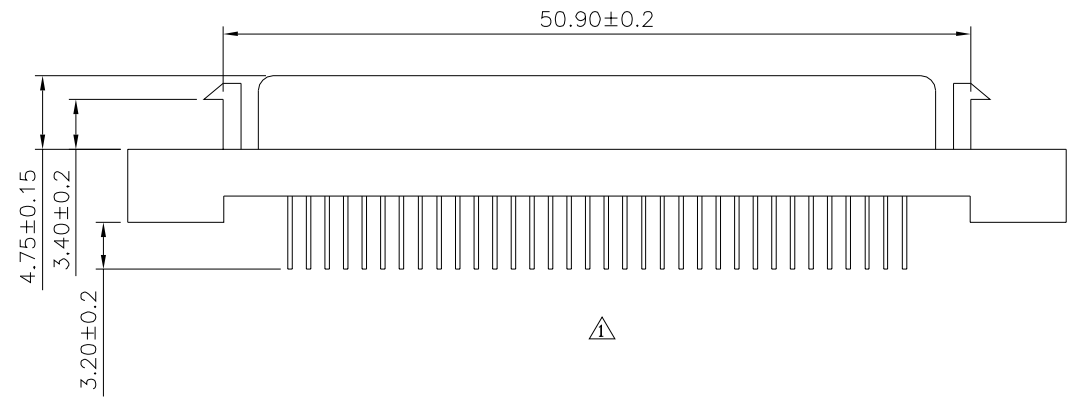


△△ SPECIFICATION
 Current Rating:0.5 Amp
 Dielectric Withstand Voltage:500V AC
 Contact Resistance:35 Milliohms Max.
 Insulation Resistance:>500 Megaohms Min.
 Operation Temperature Range:-55°C~+85°C
 Insulator:PBT(UL94V-0),Black
 Contact:Phosphor Bronze,Selective Gold Plated 5u"
 Over Nickel
 Front Shell:Steel,Nickel Plated Over Copper
 RoHS Compliant

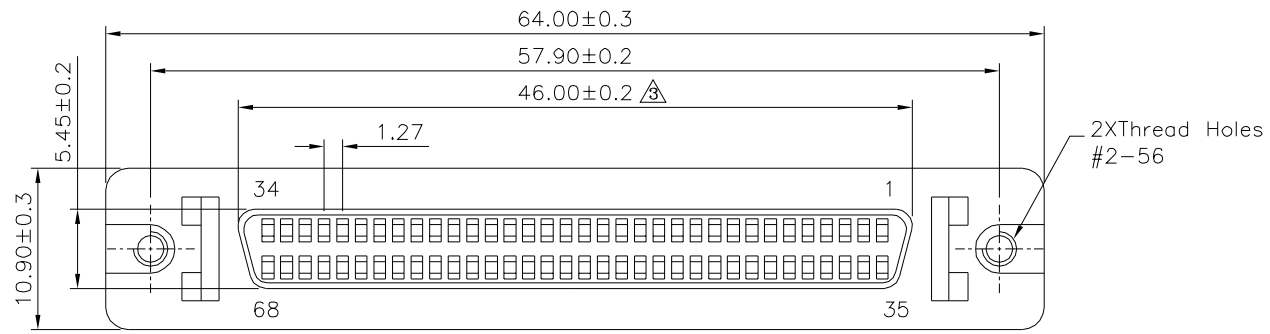

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG.
06119		MEI		
		HZF		
		DRAWING BY		
		CYP		
SCALE	NONE	REV.	B3	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△3	B3	Modify Data	HZF	12/04/2018
△2	B2	Modify Data	HZF	04/02/2014
△1	B1	Modify Data	HZF	06/28/2011
△0	B0	NEW RELEASE	BECKY	04/14/2006