
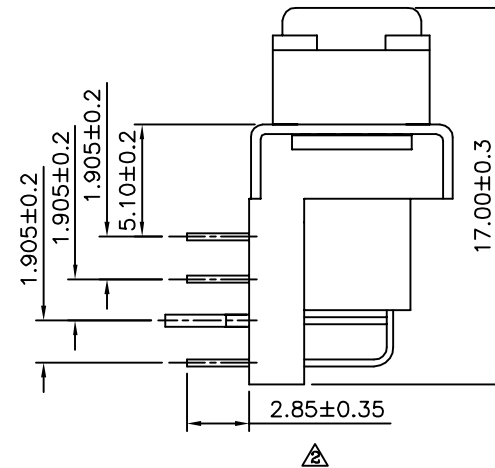


**△△ SPECIFICATION**

Contact Current Rating: 0.5 Amp  
 Insulation Resistance: >500 Megaohms Min.  
 Dielectric Withstanding Voltage: 500V AC  
 Contact Resistance: 35 Milliohms Max.  
 Operation Temperature: -55°C~+85°C  
 Housing And Cover: PBT(UL94V-0), Black  
 △ Contact: Phosphor Bronze  
 Selective Gold Plated 5u" Over Nickel  
 Front Shell: Steel, Nickel Plated Over Copper  
 Bracket: Steel, Nickel Plated Over Copper  
 Boardlock: Brass, Tin Plated Over Copper  
 RoHS Compliant

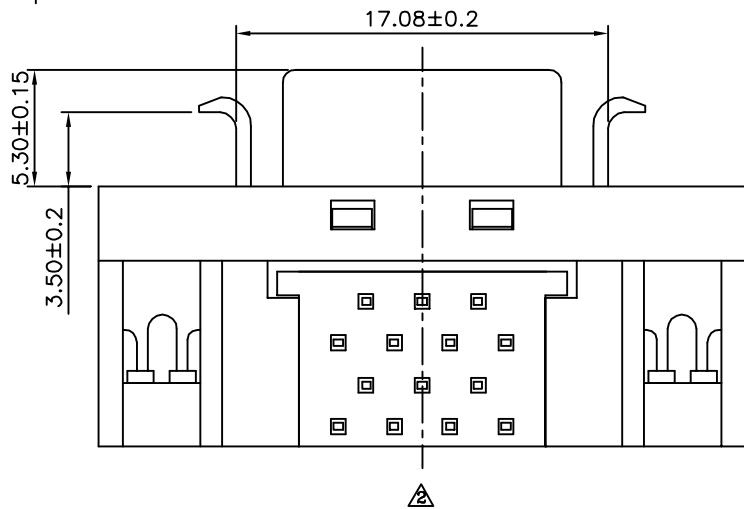

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.  
 06133

APPROVED BY  
 EMILY  
 CHECKED BY  
 HZF  
 DRAWING BY  
 HAO

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.38  
 .XX ±0.25

SCALE NONE

REV. A3

UNIT mm



NO.	REV.	REVISIONS	CHK	DATE
△A3		Modify Data	HZF	11/25/2014
△A2		Modify Data	HZF	08/17/2010
△A1		Insert Gold 5u" Selective Plated Over Tin	MEI	03/28/2003