
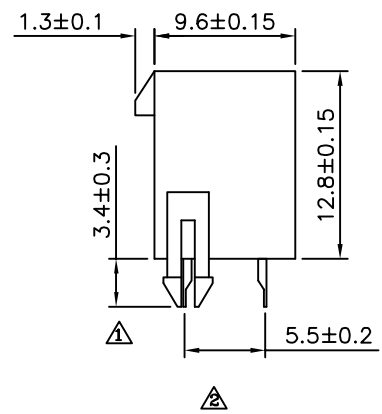
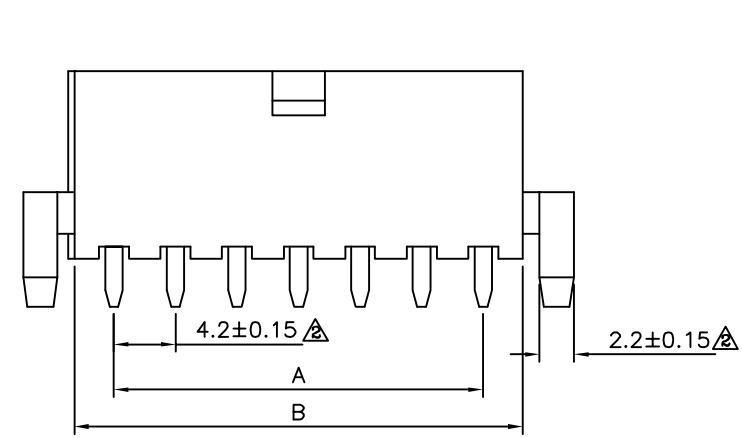
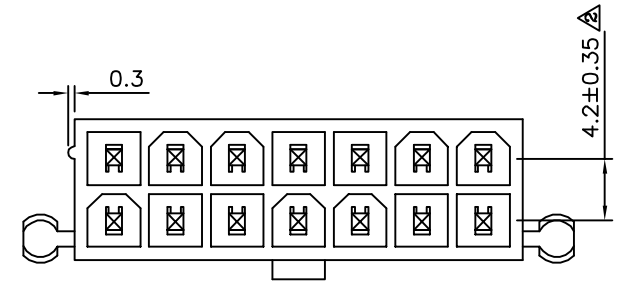


△△ SPECIFICATION
 Current Rating:8A AC/DC
 Voltage Rating:500V AC/DC
 Insulation Resistance:1000 Megaohms Min.
 Withstand Voltage:1500V AC/Minute
 Temperature Range:-25°C To +85°C
 Contact:Brass,Tin Plated
 Insulator:PA66(UL94V-2),Nature
 RoHS Compliant

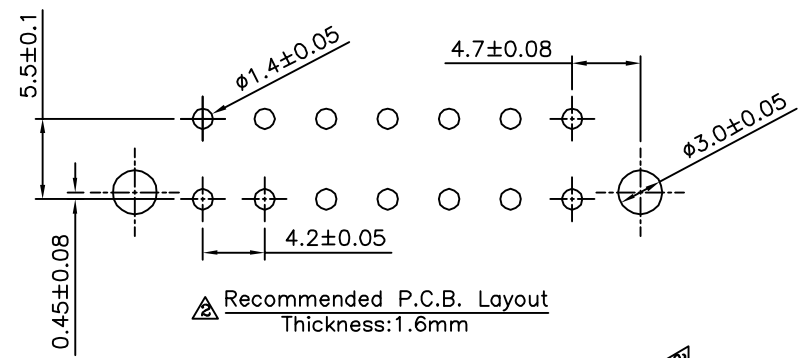

△△ Pin	A	B	TOL.
2	/	5.2	±0.20
4	4.20	9.4	
6	8.40	13.6	
8	12.60	17.8	±0.30
10	16.80	22.0	
12	21.00	26.2	
14	25.20	30.4	±0.40
16	29.40	34.6	
18	33.60	38.8	
20	37.80	43.0	±0.40
22	42.00	47.2	
24	46.20	51.4	

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ X _s ±0.5 XX ±0.25 .XXX ±0.08
06208		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		
		CYP		
SCALE	NONE	REV.	B2	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ B2		Modify Data	HZF	05/09/2015
△ B1		Modify Data	HZF	10/20/2009
△ B0		NEW RELEASE	INGRID	12/14/2007