
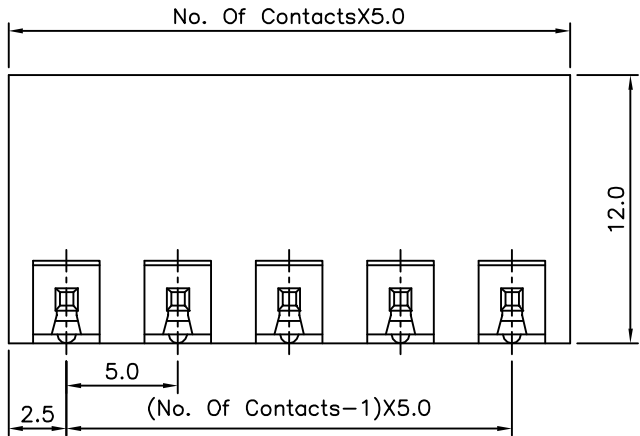
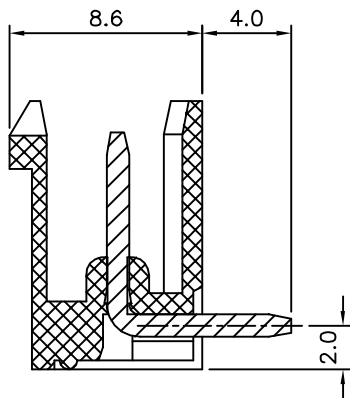


Recommended P.C.B. Layout

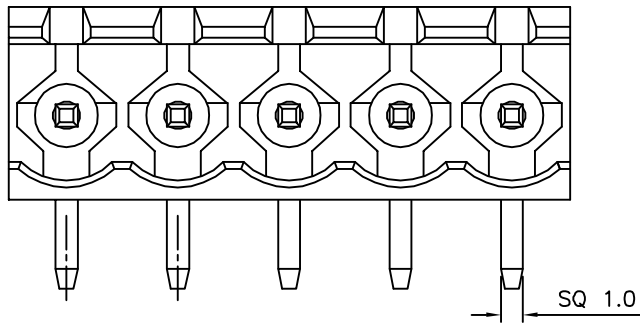

△ SPECIFICATION
 Current Rating:10A
 Voltage Rating:250V AC
 Withstand Voltage:2500V AC(1 Minute)
 Insulation Resistance:5000 Megohms At DC 1000V
 Using Temperature Range:-40°C~+105°C
 Soldering Temperature:+250°C,5 Seconds Max.
 Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Green
 Contact:Copper Alloy,Tin Plated
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

| | | | |
|-------------|------|-------------|----|
| DRAWING No. | | APPROVED BY | |
| 06629 | | EMILY | |
| | | CHECKED BY | |
| | | HZF | |
| | | DRAWING BY | |
| | | WSS | |
| SCALE | NONE | REV. | A1 |

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ±0.50
 .X ±0.30
 .XX ±0.20
 X° ±1°

| | | | | |
|------|------|-------------|-----|------------|
| NO. | REV. | REVISIONS | CHK | DATE |
| △ A1 | | Modify Data | HZF | 04/20/2011 |
| △ A0 | | NEW RELEASE | HZF | 05/13/2009 |

