

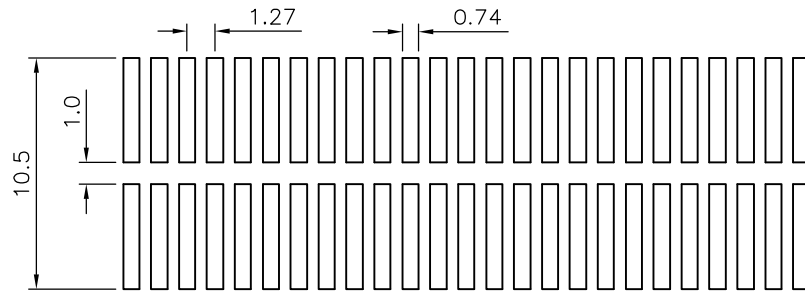



SPECIFICATION

Contact: Brass, Gold Flash Over Nickel
 Insulator: PA6T
 RoHS Compliant

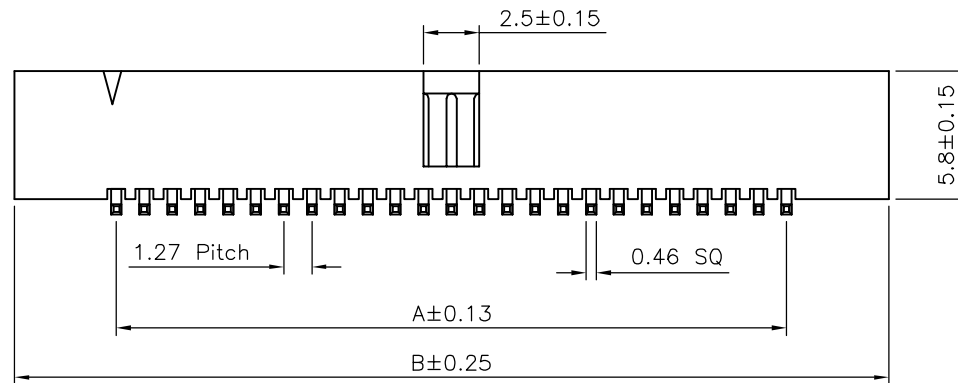

Recommended P.C.B. Layout

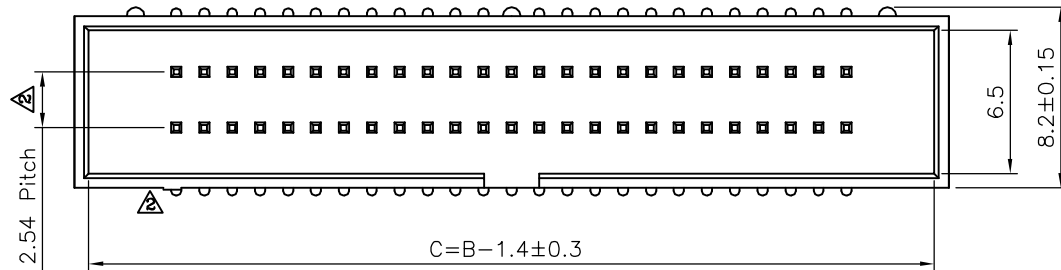

Circuits	A	B
08	3.81	13.10
10	5.08	14.37
20	11.43	20.72
26	15.24	24.53
30	17.78	27.07
34	20.32	29.61
40	24.13	33.42
44	26.67	35.96
50	30.48	39.77
60	36.83	46.12
68	41.91	51.20
80	49.53	58.82
100	62.23	71.52

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

06666

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

QQJ

SCALE

NONE


REV.

B2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG.

UNIT

mm



NO.	REV.	REVISIONS	CHK	DATE
B2		Modify Data	HZF	06/18/2010
B1		Modify Data	HZF	07/24/2007
B0		NEW RELEASE	BECKY	03/08/2006

NO. REV.

REVISIONS

CHK

DATE