
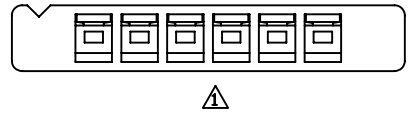
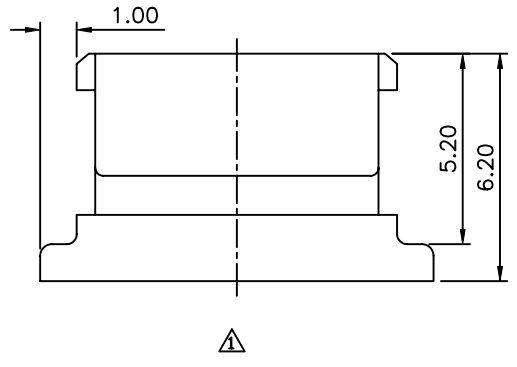

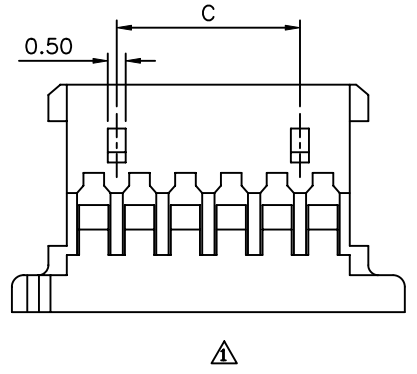


SPECIFICATION
 Rating:30V 1A,AC/DC
 Material:PA66(UL94V-0)
 RoHS Compliant

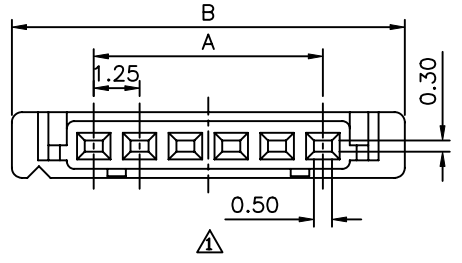

| Pin | A | B | C |
|-----|-------|-------|-------|
| 2 | 1.25 | 5.72 | - |
| 3 | 2.50 | 6.97 | - |
| 4 | 3.75 | 8.22 | 2.50 |
| 5 | 5.00 | 9.47 | 3.75 |
| 6 | 6.25 | 10.72 | 5.00 |
| 7 | 7.50 | 11.97 | 6.25 |
| 8 | 8.75 | 13.22 | 7.50 |
| 9 | 10.00 | 14.47 | 8.75 |
| 10 | 11.25 | 15.72 | 10.00 |
| 12 | 13.75 | 18.22 | 12.50 |
| 14 | 16.25 | 20.72 | 15.00 |
| 15 | 17.50 | 21.97 | 16.25 |
| 16 | 18.75 | 23.22 | 17.50 |
| 18 | 21.25 | 25.72 | 20.00 |
| 20 | 23.75 | 28.22 | 22.50 |
| 22 | 26.25 | 30.72 | |
| 24 | 28.75 | 33.22 | |
| 26 | 31.25 | 35.72 | |
| 28 | 33.75 | 38.22 | |
| 30 | 36.25 | 40.72 | |

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 07008
 SCALE NONE

APPROVED BY EMILY
 CHECKED BY HZF
 DRAWING BY WZL
 REV. A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.30
 .XX ±0.20
 .XXX ±0.10
 ANG. ±2°
 UNIT mm

| NO. | REV. | REVISIONS | CHK | DATE |
|------|------|-------------|-----|------------|
| △ A1 | | Modify Data | HZF | 03/24/2011 |
| △ A0 | | NEW RELEASE | | |