

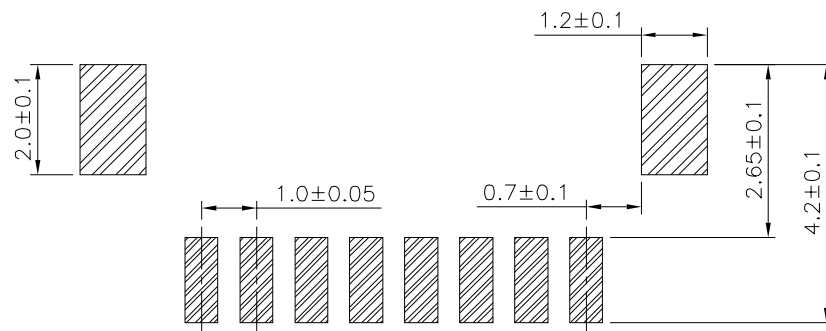
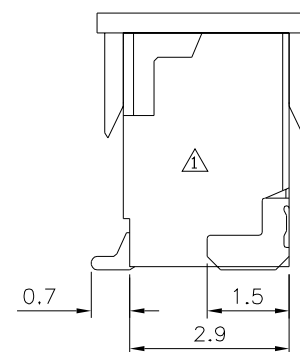


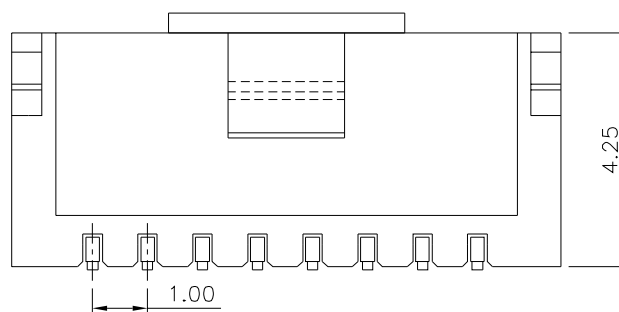

Recommended P.C.B. Layout

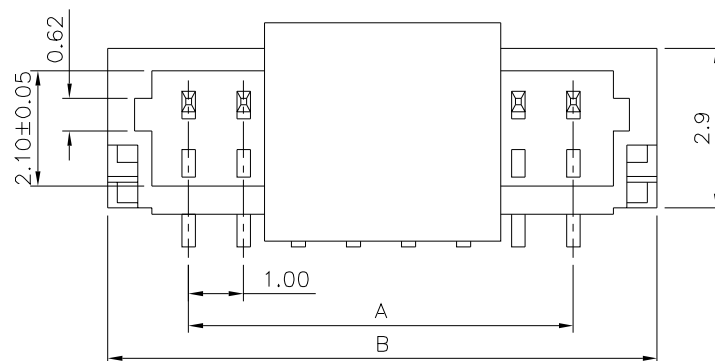

# SPECIFICATION

Voltage Rating:50V AC

Current Rating:1.0A

Dielectric Withstanding Voltage:500V AC/1 Minute

Contact Resistance:20 Milliohms Max.

Insulation Resistance:100 Megaohms Min.

Temperature Range:-25°C~+85°C

Advise Work Condition:260°C Max. (Peak Temperature)

3 Sec. Or Less

Advise Work Time:120 Sec.~150 Sec.

Insulator:PA6T(UL94V-0),Nature

Contact:Phosphor Bronze,Tin Plated

RoHS Compliant

| Poles | A    | B    |
|-------|------|------|
| 2     | 1.0  | 4.0  |
| 3     | 2.0  | 5.0  |
| 4     | 3.0  | 6.0  |
| 5     | 4.0  | 7.0  |
| 6     | 5.0  | 8.0  |
| 7     | 6.0  | 9.0  |
| 8     | 7.0  | 10.0 |
| 9     | 8.0  | 11.0 |
| 10    | 9.0  | 12.0 |
| 11    | 10.0 | 13.0 |
| 12    | 11.0 | 14.0 |
| 13    | 12.0 | 15.0 |
| 14    | 13.0 | 16.0 |
| 15    | 14.0 | 17.0 |
| 16    | 15.0 | 18.0 |
| 20    | 19.0 | 22.0 |

**4UCON**

元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

07298

SCALE NONE

APPROVED BY EMILY

CHECKED BY HZF

DRAWING BY SONG


REV. A1

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE

.X ±0.25

.XX ±0.15

UNIT  
mm



| NO. | REV. | REVISIONS   | CHK | DATE       |
|-----|------|-------------|-----|------------|
|     | A1   | Modify Data | HZF | 07/18/2014 |
|     | A0   | NEW RELEASE | HZF | 11/21/2009 |