

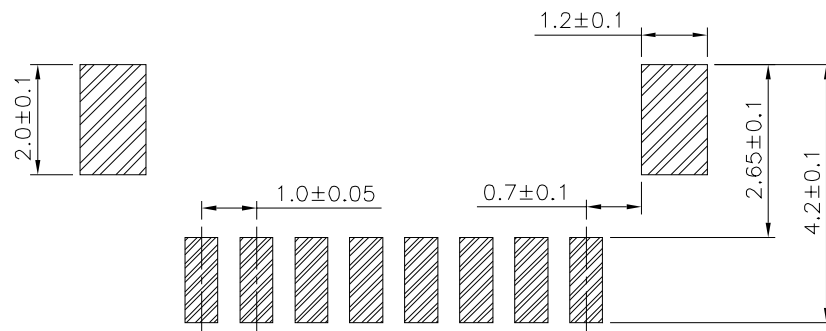
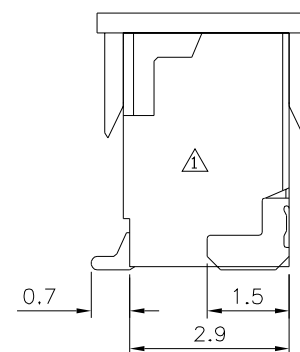


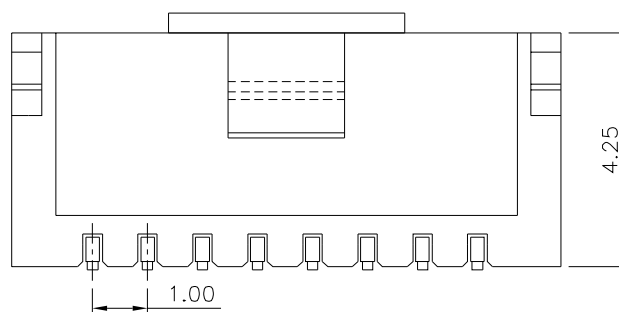

Recommended P.C.B. Layout

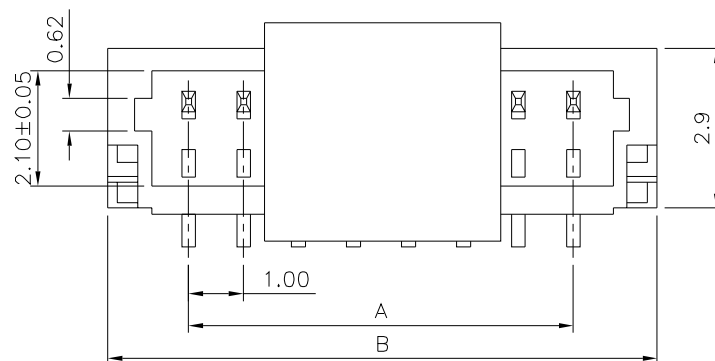

SPECIFICATION

Voltage Rating:50V AC

Current Rating:1.0A

Dielectric Withstanding Voltage:500V AC/1 Minute

Contact Resistance:20 Milliohms Max.

Insulation Resistance:100 Megaohms Min.

Temperature Range:-25°C~+85°C

Advise Work Condition:260°C Max. (Peak Temperature)

3 Sec. Or Less

Advise Work Time:120 Sec.~150 Sec.

Insulator:PA6T(UL94V-0),Nature

Contact:Phosphor Bronze,Tin Plated

RoHS Compliant

Poles	A	B
2	1.0	4.0
3	2.0	5.0
4	3.0	6.0
5	4.0	7.0
6	5.0	8.0
7	6.0	9.0
8	7.0	10.0
9	8.0	11.0
10	9.0	12.0
11	10.0	13.0
12	11.0	14.0
13	12.0	15.0
14	13.0	16.0
15	14.0	17.0
16	15.0	18.0
20	19.0	22.0

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

07301

SCALE NONE

APPROVED BY EMILY

CHECKED BY HZF

DRAWING BY SONG


REV. A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.25

.XX ±0.15

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
	A1	Modify Data	HZF	07/18/2014
	A0	NEW RELEASE	HZF	11/21/2009